

Customized FORM PTO-1590		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY DOCKET NO. P07245US00/DEJ	
<b>TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371</b>				U.S. APPLICATION NO. (If known, see 37CFR 1.5)	
INTERNATIONAL APPLICATION NO. PCT/FR99/03017		INTERNATIONAL FILING DATE 03 December 1999		PRIORITY DATE CLAIMED 03 December 1998	
TITLE OF INVENTION: DEVICE FOR FASTENING OR ADJUSTING PARTS OF A GARMENT, SHOE OR...					
APPLICANT(S) FOR DO/EO/US: SITBON					
Applicant herewith submits to the US Designated/Elected Office (DO/EO/US) the following items and other information:					
<input checked="" type="checkbox"/>	1. This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.				
	2. This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 USC 371.				
<input checked="" type="checkbox"/>	3. This express request to begin national examination procedures (35 USC 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 USC 371(b) and PCT Art. 22 and 39(1).				
<input checked="" type="checkbox"/>	4. A proper Demand for International Preliminary Examination was made by the 19 <sup>th</sup> month from the earliest claimed priority date.				
<input checked="" type="checkbox"/>	5. A copy of the International Application as filed (35 U.S.C. 371 (c)(2))				
	a. is transmitted herewith (required only if not transmitted by the International Bureau).				
<input checked="" type="checkbox"/>	b. has been transmitted by the International Bureau.				
	c. is not required, as the application was filed in the United States Receiving Office (RO/US).				
<input checked="" type="checkbox"/>	6. A translation of the International Application into English (35 U.S.C. 371(c)(2)).				
	7. Amendments to the claims of the International Appln. under PCT Article 19 (35 USC 371 (c)(3))				
	a. are transmitted herewith (required only if not transmitted by the International Bureau).				
	b. have been transmitted by the International Bureau.				
	c. have not been made; however, the time limit for making such amendments had NOT expired.				
	d. have not been made and will not be made.				
	8. A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).				
	9. An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).				
	10. A translation of the annexes to the Int'l Prelim. Exam. Report under PCT Article 36 (35 U.S.C. 371(c)(5)).				
	Items 11 to 20 below concern document(s) or information included:				
	11. An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98.				
	12. An Assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included				
<input checked="" type="checkbox"/>	13. A First preliminary amendment.				
	14. A Second or Subsequent preliminary amendment.				
	15. A substitute specification.				
	16. A change of power of attorney and/or address letter.				
	17. A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 & 35 USC 1.821-825.				
	18. A second copy of the published international application under 35 USC 154(d)(4).				
	19. A second copy of the English translation of the international application under 35 USC 154(d)(4).				
	20. Other items or information:				
	A copy of the Notification of Missing Requirements under 35 U.S.C. 371.				
<input checked="" type="checkbox"/>	In the event that a petition for extension of time is required to be submitted herewith, and in the event that a separate petition does not accompany this response, applicant hereby petitions under 37 CFR 1.136(a) for an extension of time of as many months as are required to render this submission timely. Any fee is authorized in 17(c).				

Date: 4 June 2001

U.S. APPLICATION NO. <i>(if known)</i> <b>097/857347</b>		INTERNATIONAL APPLICATION NO. PCT/FR99/03017		ATTORNEY DOCKET NO. P07245US00/DEJ	
<b>X 21. The following fees are submitted:</b> <b>X Basic National Fee</b> (37 CFR 1.492 (a) (1)-(5): Neither Int'l Prelim. Exam. fee nor Int'l Search fee paid to USPTO      \$1000 <b>X</b> Search Report has been prepared by the EPO or JPO      \$ 860 No Int'l Prelim. Ex. fee paid to USPTO but Int'l Search fee paid to USPTO      \$ 710 International preliminary examination fee paid to USPTO      \$ 690 Int'l Prelim. Ex. fee paid to USPTO & all claims satisfied PCT Art. 33(1)-(4)      \$ 100				<b>CALCULATIONS PTO USE ONLY</b>	
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>\$ 860.00</b>	
Surcharge of \$130 for furnishing the oath or declaration later than [ ] 20 mos. from the earliest claimed priority date (37 CFR 1.492(e)). [ ] 30 mos. +				<b>\$</b>	
<b>CLAIMS</b>	<b>NUMBER FILED</b>	<b>NUMBER EXTRA</b>	<b>RATE</b>		
Total Claims	49 - 20 =	29	<b>X \$18 =</b>	<b>\$ 522.00</b>	
Independent Claims	1 - 03 =	0	<b>X \$80 =</b>	<b>\$</b>	
Multiple Dependent Claim(s) (if applicable)			<b>+ \$270 =</b>	<b>\$</b>	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				<b>\$ 1382.00</b>	
<b>X</b> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by ½.				-	<b>\$ 691.00</b>
<b>SUBTOTAL =</b>				<b>\$ 691.00</b>	
Processing fee of \$130 for furnishing the English translation later than [ ] 20 mos. from the earliest claimed priority date (37 CFR 1.492(f)). [ ] 30 mos. +				<b>\$</b>	
<b>TOTAL NATIONAL FEE =</b>				<b>\$ 691.00</b>	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40 per property				+	<b>\$</b>
<b>TOTAL FEES ENCLOSED =</b>				<b>\$ 691.00</b>	
<i>Amount to be</i>				<i>Refunded</i>	<i>\$</i>
				<i>Charged</i>	<i>\$</i>
<b>X a.</b> A check in the amount of \$691.00 to cover the above fees is enclosed. <b>b.</b> Please charge my Deposit Account No. 12-0555 in the amount of \$ to cover the above fees. <b>X c.</b> The Commissioner is hereby authorized to charge any additional fees required or credit overpayment to Deposit Account No. 12-0555.					
<b>Note:</b> Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
<b>SEND ALL CORRESPONDENCE TO:</b>					
<b>Douglas E. Jackson</b> At the address (below) of <b>CUSTOMER NO. 000881.</b>  <b>LARSON &amp; TAYLOR, PLC</b> <b>1199 NORTH FAIRFAX ST.</b> <b>SUITE 900</b> <b>ALEXANDRIA, VA 22314</b>			<b>SIGNATURE:</b> <i>Douglas E. Jackson</i> <b>NAME:</b> Douglas E. Jackson <b>REG. NO.:</b> 28,518 <b>PHONE NO.:</b> 703-739-4900 <b>Date:</b> 4 June 2001		

09/857347

JC19 Rec'd PCT/PTO 0 4 JUN 2001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Patent

In re patent application of: SITBON

Serial No.: NEW APPLICATION

Examiner:

Based on PCT/FR99/03017

Filed: 4 June 2001

Art Unit:

For: DEVICE FOR FASTENING OR ADJUSTING PARTS  
OF A GARMENT, SHOE OR OTHER ACCESSORY

Docket No.:

P07245US00/DEJ

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
Washington, D.C.

S I R:

Prior to examination, please amend the above-identified application as follows.

IN THE CLAIMS:

A clean version of the amended claims is provided herewith in **Attachment A**. It will be noted that the claims have been amended relative to the previously provided version as shown by the marked up version thereof in **Attachment B** provided herewith.

REMARKS

By this Amendment, the claims have been rewritten to reduce the multiple dependencies.

Further and favorable action is solicited.

Respectfully submitted,

Date: 4 June 2001

By: Douglas E. Jackson  
Douglas E. Jackson  
Registration No. 28,518

LARSON & TAYLOR PLC  
Transpotomac Plaza  
1199 North Fairfax Street, Suite 900  
Alexandria, Virginia 22314  
(703) 739-4900

## ATTACHMENT A

### Clean Replacement/New Claims

*Following herewith is a clean copy of each claim which replaces each previous claim having the same number.*

4. (Amended) A device as claimed in claim 1, wherein the first part and/or second part (14, 22, 23) have two sheathes.
5. (Amended) A device as claimed in claim 1, wherein one of the first and second parts is at least in part formed by a strap (333, 334, 330) or braces (261).
7. (Amended) A device as claimed in claim 1, wherein one or more magnets or ferromagnetic elements (34) of a part of the device, are concave in shape, and the magnet(s) or ferromagnetic element(s) (35) of the other part is(are) convex in shape and complementary to the said concave shape.
8. (Amended) A device as claimed in claim 1, wherein one or more magnets or ferromagnetic elements (4, 6, 11, 12, 17, 18, 25, 30) are flat, trapezoid, rectangular, circular or triangular in shape.
12. (Amended) A device as claimed in claim 1, wherein it contains the means (55) for mechanically moving the sheath(es).

13. (Amended) A device as claimed in claim 1, wherein at least one of the first and second parts has a series (67) of at least two magnets or ferromagnetic elements (68, 69) hinged together.

14. (Amended) A device as claimed in claim 1, wherein at least one of the magnets (70, 71) is surface-polarised.

15. (Amended) A device as claimed in claim 1, wherein the polarisation of at least one of the magnets is axial (78), parallel to the sheath.

16. (Amended) A device as claimed in claim 1, wherein at least one of the magnets (72, 73, 79, 80, 81, 82, 83) is multipolar.

17. (Amended) A device as claimed in claim 1, wherein it contains at least two magnets (80, 81, 82, 83) in the same sheath, of opposite polarisation.

18. (Amended) A device as claimed in claim 1, wherein each magnet (85) is associated with an anti-magnetic protection component (86, 77, 91, 105).

19. (Amended) A device as claimed in claim 1, wherein at least one magnet being multipolar, it is sandwiched between two parts (91) used to block the magnetic flux.

20. (Amended) A device as claimed in claim 1, wherein the magnet being of width  $d$ , the structural thickness of the device between the magnet and ferromagnetic element is less than  $d/12$ .

21. (Amended) A device as claimed in claim 1, wherein at least one magnet or ferromagnetic element is glued, welded or embedded on a support plate (93, 96, 104).

22. (Amended) A device as claimed in claim 1, wherein the sheath also has a strip of ferromagnetic cloth (108) along all or part of its length.

23. (Amended) A device as claimed in claim 1, wherein the sheath also has stitches sewn with ferromagnetic conductor wire (112) along at least part of its length.

24. (Amended) A device as claimed in claim 1, wherein the magnets or ferromagnetic elements (114) have rounded edges (115).

25. (Amended) A device as claimed in claim 1, wherein the magnets are produced from the family of rare earths of the type Neodymium Iron Boron.

26. (Amended) A device as claimed in claim 1, wherein it contains the means (120, 137, 308, 331, 362) to activate the movable magnet(s) or ferromagnetic element(s) remotely.

31. (Amended) A device as claimed in claim 26, wherein the means for remote activation include a photoelectric sensor (144), and/or a temperature sensor, and/or a humidity sensor.

32. (Amended) A device as claimed in claim 26, wherein the means for remote activation include an elastic or spring-operated traction system (161, 164; 160, 162) using attached or connected to the movable magnet or ferromagnetic element, and capable of acting through the corresponding sheath, and a system for locking the said traction system in one or more preset positions.

34. (Amended) A device as claimed in claim 1, wherein at least one magnet (210) is formed from a block drilled along its axis with at least one cylindrical hole (211) and containing, on the side of one of its surfaces, a transverse channel (212) parallel to the said surface and through which sewing thread can be run entirely below the said surface.

35. (Amended) A device as claimed in claim 1, wherein at least one magnet is formed from a block drilled along its axis with at least one cylindrical hole and containing, on the side of one of its surfaces, a cupel (222) through which sewing thread can be run entirely below the said surface.

36. (Amended) A device as claimed in claim 34, wherein the magnet has two cylindrical holes (212, 212').

37. (Amended) A device as claimed in claim 34, wherein the magnet(s) are covered with an anti-magnetic sheath on at least one surface.

38. (Amended) A device as claimed in claim 1, wherein it also contains the means (234, 235, 236) for detecting and signalling that the parts of the garment, shoe or any other accessory are correctly fastened or fitted.

40. (Amended) A device as claimed in claim 38, wherein it also contains the means for triggering an alarm or sending a command if specific preset conditions are complied or not complied with.

41. (Amended) A device for a shoe as claimed in claim 27, wherein the means for remote activation include a switch located in the sole of the shoe, which can be activated by the user when he puts his foot in the shoe, this allowing automatic adjustment of the shoe.

42. (Amended) A device for adjusting the hem of a garment, as claimed in claim 1, wherein the sheath is extended by a piece of fabric to which the second magnetic or ferromagnetic element is attached.



44. (Amended) A shoe, containing a device as claimed in claim 1.

46. A shoe as claimed in claim 27:

wherein it is comprised of three solid sections, namely, a right section (332), a left section (331) and a central section (333), and two open sections, each one separating the two solid sections on either side of it, the device containing at least one strap (334) fixed to the middle on the central section and fitted on both sides with sheathes (326) containing movable magnets (325), used to bring the right and left sections towards the central section, in order to adjust tightening of the shoe;

wherein the device has at least one adjustment strap (330) containing a magnet or ferromagnetic part which disappears into the wall of the shoe, the motorisation system being capable of pulling or releasing the said strap automatically.

47. (Amended) A garment, containing a device as claimed in claim 1.

48. (Amended) A garment as claimed in claim 38, wherein it contains a cloth, the weft (401) of which is threaded with conductor wire connected to an alarm used to signal if the wire is cut and therefore that the garment is damaged.

49. (Amended) An accessory such as braces or belts, bags, organisers and other types of leather goods, wherein it contains a device as claimed in claim 1.

## ATTACHMENT B

### Marked Up Replacement Claims

*Following herewith is a marked up copy of each rewritten claim.*

4. (Amended) A device as claimed in ~~any preceding claim~~claim 1, wherein the first part and/or second part (14, 22, 23) have two sheathes.

5. (Amended) A device as claimed in ~~any preceding claim~~claim 1, wherein one of the first and second parts is at least in part formed by a strap (333, 334, 330) or braces (261).

7. (Amended) A device as claimed in ~~any preceding claim~~claim 1, wherein one or more magnets or ferromagnetic elements (34) of a part of the device, are concave in shape, and the magnet(s) or ferromagnetic element(s) (35) of the other part is(are) convex in shape and complementary to the said concave shape.

8. (Amended) A device as claimed in ~~any preceding claim~~claim 1, wherein one or more magnets or ferromagnetic elements (4, 6, 11, 12, 17, 18, 25, 30) are flat, trapezoid, rectangular, circular or triangular in shape.

12. (Amended) A device as claimed in ~~any preceding claim~~claim 1, wherein it contains the means (55) for mechanically moving the sheath(es).

13. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein at least one of the first and second parts has a series (67) of at least two magnets or ferromagnetic elements (68, 69) hinged together.

14. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein at least one of the magnets (70, 71) is surface-polarised.

15. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein the polarisation of at least one of the magnets is axial (78), parallel to the sheath.

16. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein at least one of the magnets (72, 73, 79, 80, 81, 82, 83) is multipolar.

17. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein it contains at least two magnets (80, 81, 82, 83) in the same sheath, of opposite polarisation.

18. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein each magnet (85) is associated with an anti-magnetic protection component (86, 77, 91, 105).

19. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein at least one magnet being multipolar, it is sandwiched between two parts (91) used to block the magnetic flux.

20. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein the magnet being of width  $d$ , the structural thickness of the device between the magnet and ferromagnetic element is less than  $d/12$ .

21. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein at least one magnet or ferromagnetic element is glued, welded or embedded on a support plate (93, 96, 104).

22. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein the sheath also has a strip of ferromagnetic cloth (108) along all or part of its length.

23. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein the sheath also has stitches sewn with ferromagnetic conductor wire (112) along at least part of its length.

24. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein the magnets or ferromagnetic elements (114) have rounded edges (115).

25. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein the magnets are produced from the family of rare earths of the type Neodymium Iron Boron.

26. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein it contains the means (120, 137, 308, 331, 362) to activate the movable magnet(s) or ferromagnetic element(s) remotely.

31. (Amended) A device as claimed in ~~any of the preceding claims claim 26 to 30~~, wherein the means for remote activation include a photoelectric sensor (144), and/or a temperature sensor, and/or a humidity sensor.

32. (Amended) A device as claimed in ~~any of the preceding claims claim 26 to 31~~, wherein the means for remote activation include an elastic or spring-operated traction system (161, 164; 160, 162) using attached or connected to the movable magnet or ferromagnetic element, and capable of acting through the corresponding sheath, and a system for locking the said traction system in one or more preset positions.

34. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein at least one magnet (210) is formed from a block drilled along its axis with at least one cylindrical hole (211) and containing, on the side of one of its surfaces, a transverse channel (212) parallel to the said surface and through which sewing thread can be run entirely below the said surface.

35. (Amended) A device as claimed in ~~any preceding claim 1~~, wherein at least one magnet is formed from a block drilled along its axis with at least one cylindrical

hole and containing, on the side of one of its surfaces, a cupel (222) through which sewing thread can be run entirely below the said surface.

36. (Amended) A device as claimed in ~~any of the claims claim~~ claim 34 to 35, wherein the magnet has two cylindrical holes (212, 212').

37. (Amended) A device as claimed in ~~any of the claims claim~~ claim 34 to 36, wherein the magnet(s) are covered with an anti-magnetic sheath on at least one surface.

38. (Amended) A device as claimed in ~~any preceding claim~~ claim 1, wherein it also contains the means (234, 235, 236) for detecting and signalling that the parts of the garment, shoe or any other accessory are correctly fastened or fitted.

40. (Amended) A device as claimed in ~~any of the claims claim~~ claim 38 and 39, wherein it also contains the means for triggering an alarm or sending a command if specific preset conditions are complied or not complied with.

41. (Amended) A device for a shoe as claimed in ~~any of the preceding claims dependent on claim 27~~, wherein the means for remote activation include a switch located in the sole of the shoe, which can be activated by the user when he puts his foot in the shoe, this allowing automatic adjustment of the shoe.

42. (Amended) A device for adjusting the hem of a garment, as claimed in ~~any of the claims claim 1 to 40~~, wherein the sheath is extended by a piece of fabric to which the second magnetic or ferromagnetic element is attached.

44. (Amended) A shoe, containing a device as claimed in ~~any of the claims claim 1 to 41~~.

46. A shoe as claimed in claim ~~45, 27~~:

wherein it is comprised of three solid sections, namely, a right section (332), a left section (331) and a central section (333), and two open sections, each one separating the two solid sections on either side of it, the device containing at least one strap (334) fixed to the middle on the central section and fitted on both sides with sheathes (326) containing movable magnets (325), used to bring the right and left sections towards the central section, in order to adjust tightening of the shoe;

~~dependent on claim 27~~, wherein the device has at least one adjustment strap (330) containing a magnet or ferromagnetic part which disappears into the wall of the shoe, the motorisation system being capable of pulling or releasing the said strap automatically.

47. (Amended) A garment, containing a device as claimed in ~~any of the claims claim 1 to 40, 42 and 43~~.

48. (Amended) A garment as claimed in ~~claim 47, dependent on claims claim~~  
38 to 40, wherein it contains a cloth, the weft (401) of which is threaded with conductor  
wire connected to an alarm used to signal if the wire is cut and therefore that the  
garment is damaged.

49. (Amended) An accessory such as braces or belts, bags, organisers and  
other types of leather goods, wherein it contains a device as claimed in ~~any of the~~  
~~claims claim~~ 1 to 48.



41/PKTS

1

09/857347

J013 Res'd PCT/PTO 0 4 JUN 2001

**DEVICE FOR FASTENING OR ADJUSTING PARTS OF A GARMENT,  
SHOE OR OTHER ACCESSORY**

This invention relates to a device for holding  
5 together, adjusting, fitting or fastening parts of a  
garment, shoe or any other accessory using magnetic  
elements.

Magnetic or ferromagnetic elements are constituents  
which play an important role in many devices in modern  
10 civilisation.

Those which are used in practice can be divided into  
two categories: soft materials, which are easily  
magnetised (high permeability and reversible effect),  
and hard materials which have strong residual  
15 magnetisation, and are used as permanent magnets.

In what follows the term ferromagnetic element shall  
be used to designate soft materials, the term magnet  
being used to designate hard materials which therefore  
form permanent magnets.

20 A magnet may be either a natural magnet or an  
artificial magnet, and can therefore vary considerably  
in its constitution. The latter can be easily shaped and  
adapted to the required usage so that they create a much



stronger and more durable magnetisation than that of natural magnets and have good stability.

Reference will also be made below to the polarities or poles of the magnets used.

5 All magnets have two opposing areas called their poles, namely a positive pole or north pole (tendency to move towards north) and an opposing negative pole or south pole.

03037347 010403  
This invention is intended for not only clothing  
10 such as work coats, jackets, overalls, dresses, skirts or trousers, but also for shoes, or accessories such as belts, straps, etc. which contain adjustment devices using magnetic elements.

It therefore has a particularly important  
15 application, although not an exclusive one, in the area of sports shoes and clothing which require fast and effective sealing with respect to a hostile external environment, as for example in infectious hospital environments or the nuclear industry (radiation  
20 protection).

Devices for adjusting or fastening clothing or shoes are already well-known. Such devices have detachable fastening elements containing male elements and female elements, the latter being connectable to the said male



elements, for example through pressure, buttons, Velcro®, zip fasteners or laces.

These different devices suffer from disadvantages.

They are not easily adjustable, requiring for example the user to unstitch or remove the elements in order to obtain the correct adjustment.

In addition, their adjustment always requires manual intervention on the part of the user, which is sometimes difficult for certain groups, for example the disabled, pregnant women, children or underwater divers.

Belts which can be adjusted with magnets (US-A-5,307,582) are also known, as are covers which can be fixed in place with magnets (FR-A-1.581.763).

Here again, these methods do not allow for optimised adjustment, as they are complicated and costly to use.

A system for fastening clothes (FR-A-2.492.938) is also known, this containing magnetic elements in rigid materials spaced along the edges of two ribbons in flexible material.

In addition, document FR-A-2.005.580 describes a system for fastening ski boots fitted with a magnetic safety device which prevents them from undoing accidentally.

Generally speaking, all these available systems using magnets to fasten two parts of a garment, a belt,



a piece of luggage, a shoe, etc. have the male and female elements in a predetermined position with no possibility of quickly and easily changing the location of these elements.

5       The object of this invention is to provide an adjustable fastening device which better meets the requirements of practical applications than those known to date, notably in that it allows fastening and/or simplified adjustment of clothing, shoes or other  
10 accessories, in a robust and resistant way, allowing immediate and easy adjustment by the user.

People handicapped either by their condition, or by their environment, or people who perform repeated movements, will thus benefit from a simple, reliable,  
15 inexpensive and easily implemented fastening device.

To this end, this invention provides in particular a device for holding together, adjusting, fitting or fastening parts of a garment, shoe or any other accessory, wherein a first part containing at least one  
20 first sheath in which at least one first magnet or ferromagnetic element is inserted, these being movable inside the said first sheath, and a second part containing at least one second magnet or ferromagnetic element subject or submitted to the magnetic attraction  
25 of the first magnet or ferromagnetic element of the



first part, are used to hold together, adjust, fit or fasten the garment, shoe or accessory when one of the said first and second parts is activated by a user to work in conjunction with the other part, a multitude of  
5 adjustments or alterations being possible through the sliding of the first magnet or ferromagnetic element in the said first sheath.

In preferred embodiments of the invention, one and/or other of the following arrangements may be used:

- 10 - the second magnet or ferromagnetic element is itself included and movable in a second sheath belonging to the second part;
- the second magnet or ferromagnetic element is attached to the second part;
- 15 - the first part and/or second part have two sheathes;
- one of the first and second parts is at least in part formed by a strap or braces;
- at least one of the first and second magnets or ferromagnetic elements is formed by a magnetised or  
20 ferromagnetic area on the said braces or strap belonging to the first or second corresponding part;
- one or more magnets or ferromagnetic elements of one part of the device are concave in shape, and the magnet(s) or ferromagnetic element(s) of the other part

2001/210



is(are) convex in shape and complementary to the said concave shape;

- one or more magnets or ferromagnetic elements are flat, trapezoid, rectangular, circular or triangular in shape;

- at least one magnet or ferromagnetic element of one part is cylindrical;

- the corresponding magnet or ferromagnetic element of the other part is flat;

- the corresponding magnet or ferromagnetic element of the other part is cylindrical;

- the device comprises the means for mechanically moving the sheath(es);

- at least one of the first and second parts has a series of at least two magnets or ferromagnetic elements hinged together;

- at least one of the magnets is surface-polarised;

- polarisation of at least one of the magnets is axial, parallel to the sheath;

- at least one of the magnets is multipolar;

- the device contains at least two magnets in the same sheath, of opposite polarisation;

- each magnet is associated with an anti-magnetic protection component;



- at least one magnet being multipolar, it is sandwiched between two parts used to block the magnetic flux;
- the magnet being of width  $d$ , the structural thickness of the device between the magnet and ferromagnetic element is less than  $d/12$ ;
- at least one magnet or ferromagnetic element is glued, welded or embedded on a support plate, for example in plastic or latex material, which can be stitched on;
- the sheath also has a strip of ferromagnetic cloth along all or part of its length;
- the sheath also has stitches sewn with ferromagnetic conductor wire along at least part of its length;
- the magnets or ferromagnetic elements have rounded edges;
- the magnets are produced from the family of rare earths of the type Neodymium Iron Boron.
- The magnets are also preferably coated with a protective layer created through nickel/copper galvanisation.
- it contains the means to activate the movable magnet(s) or ferromagnetic element(s) remotely;
- the means for remote activation contain the means for motorisation of at least one of the movable magnets or ferromagnetic parts, allowing the mechanical movement of the corresponding sheath(es);



- it contains the means for motorisation of at least one first and at least one second magnet or ferromagnetic element, capable of working in conjunction with the first one;
- 5 - the means for remote activation include a microprocessor, used for automatic adjustment so that the item can be adapted during use, by limiting tightening, and thus ensuring optimum adjustment;
- the means for remote activation also include a means
- 10 for storing different adjustments, corresponding to different users or situations;
- the means for remote activation include a photoelectric sensor, and/or a temperature sensor, and/or a humidity sensor;
- 15 - the means for remote activation include an elastic or spring-operated traction system attached or connected to the movable magnet or ferromagnetic element, and capable of acting through the corresponding sheath, and a system for locking the said traction system in one or more
- 20 preset positions;
- the traction system is attached to the sheath, or passes through the said sheath;
- at least one magnet or ferromagnetic element has a hole drilled through it transversally, for example
- 25 parallel to the active (contact) surface, at a distance





from the said surface, to prevent any accidents to the latter with respect to the continuity of its flatness;

- at least one magnet is formed from a block drilled along its axis with at least one cylindrical hole and  
5 containing, on the side of one of its surfaces, a transverse channel parallel to the said surface and through which sewing thread can be run entirely below the said surface;

10 - at least one magnet is formed from a block drilled along its axis with at least one cylindrical hole and containing, on the side of one of its surfaces, a cupel through which sewing thread can be run entirely below the said surface;

15 - the magnet has two cylindrical holes;  
- the magnet(s) are covered with an anti-magnetic sheath on at least one surface;

- the device also contains the means for detecting and signalling that the parts of the garment, shoe or any  
20 other accessory are correctly fastened or fitted;

- the detection and signalling system contains a circuit of conductor wires connected to the magnets or ferromagnetic elements, the said magnets or ferromagnetic elements acting as contactors to close the  
25 circuit;



- it also contains the means for triggering an alarm or sending a command if specific preset conditions are complied or not complied with;
- the means for remote activation include a switch
- 5 located in the sole of the shoe, which can be activated by the user when he puts his foot in the shoe, this allowing automatic adjustment of the shoe;
- the sheath is extended by a piece of fabric to which the second magnet or ferromagnetic element is attached;
- 10 - the garment is weighted inside the hem.

This invention also provides a shoe containing a device as described above.

In a preferred embodiment of the invention, the shoe has three solid sections, namely a right section, a left

15 section and a central section, and two open sections, each one separating the two solid sections on either side of it, the device containing at least one strap fixed to the middle on the central section and fitted on both sides with sheathes containing movable magnets,

20 used to bring the right and left sections towards the central section, in order to adjust tightening of the shoe.

The device also preferably has at least one adjustment strap containing a magnet or ferromagnetic

25 part which disappears into the wall of the shoe



motorisation system being capable of pulling or releasing the said strap automatically.

This invention also provides a garment containing a device as described above.

5 In a preferred embodiment, the garment contains a cloth, the weft of which is threaded with conductor wire connected to an alarm used to signal if the wire is cut and therefore that the garment is damaged.

This invention also provides an accessory such as  
10 braces or belts, bags, organisers and other types of leather goods containing a device as described above.

This invention will become better understood with regard to the following description of embodiments given hereafter by way of non-exhaustive example.

15 Reference shall now be made to the accompanying drawings, in which:

- Figures 1a, 1b, 1c and 1d are schematic top views giving the embodiment principles of the first and second parts of the device according to the invention.

20 - Figures 2a, 2b, 2c and 2d show schematically the variants of the first and second parts of the device according to the invention, comprising various forms of magnets and ferromagnetic elements.

- Figures 2e and 2f illustrate the operation of the  
25 two embodiments more specifically described here.



- Figures 2g, 2h, 2i, 2j and 2k provide schematic enlarged views of magnet/ferromagnetic element pairings of different forms associated with spring-operated systems.

5        - Figures 2l and 2m show a hinged magnet or ferromagnetic element which may be used with the invention.

10       - Figures 2o, 2p, 2q, 2r, 2s, 2t, 2u, 2v, 2w, 2x and 2y give the modes of polarisation which may be used with the magnets in the invention.

      - Figures 3a, 3b, 3c, 3d, 3e and 3f show perspective, top and cross-sectional views of different embodiments of magnets provided with anti-magnetic protection.

15       - Figures 3g and 3h show cross-sectional and perspective views of an embodiment of a magnet or ferromagnetic element glued on a support which may be used with the invention.

20       - Figures 3j and 3k give another embodiment of a magnet or ferromagnetic element and its support which may be used with the invention, comprising in addition anti-magnetic protection.

25       - Figures 3m and 3n show a cross-sectional view of a rectangular or oval magnet on a support, which may be used with a device according to the invention.

      - Figures 3o and 3p show perspective and cross-sectional views of an element of the device according to the invention.



the invention comprising a fabric sheath with a strip of ferromagnetic cloth.

- Figures 3q, 3r and 3s show cross-sectional and front views of a variant of sheath containing  
5 ferroconducting wire which may be used with the invention.

- Figures 4a and 4b show a cross-sectional, schematic view of another embodiment of a magnet or ferromagnetic element, which may be used according to  
10 the invention, thus avoiding the ironing marks which would be produced with the magnet in figures 4c and 4d.

- Figures 5a, 5b, 5c and 5d show motorised variants according to other embodiments of the invention.

- Figures 5e and 5f show schematic and cross-  
15 sectional views of shoes fitted with a device according to the invention, in which the wall of the shoe is pulled inwards.

- Figures 6a, 6b and 6c are schematic, cross-sectional and perspective views showing the principles  
20 for adjusting the hem of trousers, jackets, skirts or other clothing according to a specific embodiment of the invention.

- Figures 6d, 6e, 6f and 6g show cross-sectional and front views of another principle of hem adjustment using  
25 the invention.



- Figures 7a, 7b and 7c are cross-sectional drawings showing fastening through elastic tightening, using other embodiments of the invention.

5        - Figures 7d, 7e, 7f, 7g and 7h show schematically other principles of traction of a magnet or ferromagnetic element in the sheath, which are applied in certain embodiments of the invention.

10       - Figures 7i, 7j, 7k, 7l and 7m show principles identical to those shown in reference to figures 7d, 7e, 7f, 7g and 7h, traction being here provided by a tab and/or cable.

       - Figures 7n, 7o and 7p show other examples of traction systems and systems used to hold the magnet in the sheath.

15       - Figures 7q, 7r and 7s give other examples of traction of the magnet or ferromagnetic element which may be used with the invention.

20       - Figures 8a, 8b, 8c, 8d, 8e, 8f and 8g show the forms of magnets designed to be stitched onto clothing, which in particular may be used with the aforementioned attachment methods or with other attachment methods, as described in reference to figures 8h, 8i and 8j.

25       - Figures 8o and 8p show schematically an example of an arrangement of magnets with alternating north and south faces which may be used with an alarm circuit capable of detecting when an item is incorrectly fastened.



- Figures 8q, 8r and 8s give another embodiment of a device which may be used with a remote control system to authorise moving from one room to another.

5 - Figures 8t, 8u and 8v show a wiring arrangement, and an item of clothing which may be used with a device guaranteeing total sealing.

- Figures 9a, 9b and 9c show perspective and schematic views of overalls with braces and the embodiments of its fastenings.

10 - Figure 10 shows underwear also using a device according to an embodiment of the invention.

- Figures 11a, 11b and 11c show top and perspective views of an embodiment of a skirt or trouser belt using a device according to the invention.

15 - Figures 11d, 11e and 11f show front and cross-sectional views of a sleeved garment with an adjustment belt according to the invention, showing its operation.

- Figures 11g, 11h, 11i, 11j and 11h show a jacket and a cross-sectional view of an adjustment belt which  
20 may be used according to the invention.

- Figures 11l, 11m and 11n show a device applied to trousers, with front, side and cross-sectional views.

- Figures 12a, 12b, 12c and 12d show top, cross-sectional and side views of a shoe with an adjustable  
25 device according to several embodiments of the invention.



- Figures 13a, 13b, 13c and 13d show top and cross-sectional views of two other embodiments of the invention.

5 - Figures 14a, 14b, 14c and 14d show top and cross-sectional views of two other embodiments of shoes according to the invention.

- Figures 15a and 15b show top and cross-sectional views of another embodiment of a shoe according to the invention with an automatic adjustment device.

10 - Figures 16a, 16b, 16c and 16d show top and cross-sectional views of two other embodiments of a shoe according to the invention with an automatically adjustable device.

15 - Figures 17a and 17b show schematic and perspective views of an application for shoes of the principle presented in reference to figure 6b.

- Figures 17c, 17d, 17e, 17f, 17h and 17i show top and cross-sectional views of other embodiments of this principle.

20 - Figures 18a, 18b and 18c show a whole outfit with horizontal adjustment.

- Figures 19a and 19b show a doctor's or dentist's coat with a detachable bib and adjustment device.





In what follows, if possible the same reference numbers will be used to designate the same elements or similar elements.

The magnets used in the embodiments of the invention  
5 more specifically described here are preferably based on compressed Neodymium Iron Boron of 7.3 to 7.5 g/cm3 density, the coating of the magnet being obtained through a nickel and copper-based alloy.

One of the difficulties encountered in this  
10 invention was being able to guarantee the correct operation of the magnets over time.

Taking into account the ageing of magnets when they are subject to high temperatures and repeated washing, this ageing gradually tending to an asymptotic limit, it  
15 is therefore preferable to use aged magnets.

Figure 1a shows a device 1 for holding together, adjusting, fitting or fastening parts of a garment, shoe or any other accessory, containing a first part 2, comprising at least one sheath 3 in which is inserted a  
20 magnet known as the first magnet 4 which may be also a ferromagnetic element.

Magnet 4 is movable inside the sheath which is for example made up of a double strip of fabric 1 cm wide.



Device 1 also contains a second part 5 comprising a second magnet 6 or ferromagnetic element which can work in conjunction with the first magnet 4.

As shown by the arrows 7, the first magnet 4 which is narrower than the width of the sheath, can slide in the said sheath 3 between different positions, a multitude of adjustments or alterations being possible.

Figure 1b shows a second embodiment of a device 8 according to the invention comprising two parallel sheathes 9 and 10, for example made up of fabric conduits or channels of the same width and of a longer length, the said conduits being arranged or likely to be arranged opposite each other when the device is used, to fasten or adjust two open parts of clothing.

These two sheathes 9 and 10 belong respectively to a first and second part of the device 8 to which they are fixed.

Sheathes 9 and 10 each have a ferromagnetic element 11 and 12 of which at least one is comprised of a magnet, the two elements being capable of working in conjunction with each other, allowing a double adjustment, which is for example preferable in certain embodiments such as belts for clothing.

Figure 1c shows a third embodiment of a device 13 according to the invention. Device 13 contains firstly



part 14 comprising two sheathes 15 and 16 lying head to tail one against the other, each having two identical ferromagnetic elements or magnets 17, the said ferromagnetic elements being capable of working in  
5 conjunction with two magnets or ferromagnetic elements 18 belonging to a second part 19 of the device according to the invention.

In this example, the second part 19 is formed of two identical sleeves 20, for example made out of fabric,  
10 lying opposite and at a distance from each other, and fixed to one or more parts of the garment, it being possible to arrange them opposite the two sheathes 15 and 16 respectively.

The magnets or ferromagnetic elements 18 are fixed  
15 to them, for example by gluing and/or simply by being held in place at one end of the sleeve, for example with stitches 21.

Figure 1d shows another embodiment of a device 22 according to the invention comprising a first part 23  
20 containing two identical movable sheathes 24 which each have two identical magnets 25, and move inside the sheath in the direction of the arrows 26.

Device 22 also comprises a second part 27, for example made up of a strip forming two sleeves 28 with  
25 two central parts 29, inside which two ferromagnetic elements 30 are held in place.



Figures 1a to 1d show that when the ferromagnetic elements and magnets are activated with each other and therefore held in place by an air-gap created by the single and/or double thicknesses of the sheathes or strips in which the said elements are located, the sheathes which are attached to one part of a garment, shoe or other accessory, can be moved with the said part of the garment in relation to the other part of the garment, this being attached to the second part, which will allow adjustment or alteration through the sliding of the first ferromagnetic element or magnet in the corresponding sheath(es).

In the embodiments represented in reference to figures 1a to 1d, the magnets or ferromagnetic elements are symbolised cross-sectionally in the form of a rectangular plate.

Figure 2a shows another device 31 comprising two elements 32 (ferromagnetic and magnet) of identical parallelepipedic shape, capable of working in conjunction with each other.

The elements 32 are longer than their width and/or thickness, for example more than five times, and in particular more than ten times longer.

Figure 2b shows another embodiment 33 of two elements 34 and 35 capable of working in conjunction with each other, namely a ferromagnetic element 34 in



the form of a partial cylinder or ovoid, with an internal orifice or internal recess 36 approximately circular in section, and a cylindrical magnet 35 on which the arrows 37 schematically show the direction of rotation of the magnet around an axis 38 perpendicular to the plane of the strip or sheath in which the magnet is going to move.

Figure 2c shows a different device 39 according to the invention comprising a first sheath 40 fitted with a cylindrical magnet 41, which can rotate (arrow 42) and move in the said sheath 40, and a second part 43 fitted with a magnet 44 in the form of a parallelepipedic block capable of working in conjunction with the cylindrical magnet 41 when the latter is brought towards the said element 43.

Figure 2d shows another embodiment of a device 45 according to the invention comprising two identical cylindrical magnets 41, capable of working in conjunction with each other and of turning one in relation to the other around their axis when these magnets are moved inside the two sheathes 46 placed opposite each other.

Figure 2e is a schematic representation showing operation of an embodiment of the invention using the movement of the tab 47 in relation to the two cylindrical magnets 48 opposite each other which are

2001/210

L

therefore going to grip the thickness 49 of the tab, at least one of the elements 48 therefore moving inside the tab or sheath 49, the other element being capable of turning in relation to its support, for example a garment.

Figure 2f shows another embodiment of a device 50 according to the invention comprising a double set of double tabs 51 opposite each other, each one having two cylindrical ferromagnetic elements or magnets 52 on either side of a longitudinal internal wall 53, the point 54 symbolising the point of magnetic contact between the two tabs 51, movable in relation to each other in the direction of the arrows 55.

Figure 2g shows an enlarged view of an embodiment of a magnet / ferromagnetic element pairing which may be used with the invention, namely a cylindrical magnet 56 with a hollowed out central axis 57 and a flat, parallelepipedic ferromagnetic element 58, the two ferromagnetic elements being activated in relation to each other via an air-gap field 59 created by the thickness of the casing 60 of the fabric sheath.

Figure 2h shows a schematic embodiment of a magnet 61 to which a return spring 62 is attached, making it possible to bring the magnet back to a preset position, the said spring being for example attached to one of the ends of the sheath in which the magnet 61 is moved.

2004/210  
P

Figure 2i shows another embodiment of a magnet / ferromagnetic element pairing with a stretched elastic return thread 63.

Figures 2j and 2k show another embodiment of a  
5 ferromagnetic element / magnet pairing, containing two cylindrical magnets 64 held in place in relation to each other via an axis for example in plastic material 65 and containing between the said magnets a helical spring 66 allowing the relative movement of the two magnets in  
10 relation to each other and with respect to their cylindrical axial support 65, the magnets 64 being arranged to work in conjunction with the ferromagnetic elements 58 located on either side of them on a second fixed part, the spring 66 allowing movement of the  
15 magnets 64 in the sheath, one of the said magnets 64 also being for example attached to the said sheath and the other magnet being movable, this allowing the "gathering" of the sheath concerned.

Figures 2l and 2m show another embodiment of a  
20 magnet or ferromagnetic element 67 according to the invention containing in this example two hinged magnets or ferromagnetic elements 68 and 69, namely a first parallelepipedic magnet or ferromagnetic element 68, and a second parallelepipedic magnet or ferromagnetic  
25 element 69 with a fork 70 at one end, one of the ends 71 of the magnet 68 being inserted into the said fork, and held in place as it rotates in relation to the magnet

2001/110



via an axis 72 for example in plastic material, the magnet 68 being attached to the centre of the said axis in such a way that the magnets 68 and 69 are not in contact with each other.

- 5 A hinged magnet therefore allows a degree of freedom in a transverse direction in relation to the longitudinal movement of hinged magnets, for example, in the sheath concerned.

Figures 2o to 2y show different embodiments of polarisation for the magnets used with the invention.

Figure 2o shows a magnet 70' in the form of an oval block, from front and side views, the upper side being for example the north pole, and the lower side the south pole.

- 15 Figure 2p shows a magnet or a ferromagnetic element 71' in the form of a rectangular block according to the invention, the upper side again being in this example the north face, and the lower side being the south face.

Figure 2q shows a "multipolar" magnetised block 72'. This block 72', for example oval in shape, comprises a first sector magnetised positively, a second opposing sector magnetised negatively, this pattern being repeated for example over three different sector sections.

- 25 Figure 2r is a cross-sectional view of another embodiment of a three-part magnet 73 according to the invention, of which a first end 74 is magnetised south-





ath 86  
2004/210



internally coated with ferromagnetic protective materials, this limiting the effects of magnetism on the user and/or his environment.

5 This protection of one or more surfaces of the magnet with a non-ferromagnetic and insulating material prevents the surfaces from emitting electromagnetic radiation towards the outside. Such protection may be made up of layers of stainless steel of the type AISI304, AISI304L, AISI305 or AISI306, with low carbon  
10 content.

This does not prevent the creation of effective magnetic attraction in the air-gap 88.

Figure 3e shows an embodiment of protection 87 of the magnet 85 which may be used according to the  
15 invention, the protection 87 preventing leakage from the magnetic field, the framing of the parallelepipedic magnet and the external cylindrical shape of the protection 87 allowing almost total cancellation of the said magnetic fields.

20 The embodiment in figure 3e shows that the two ferromagnetic elements and magnets of the first and second parts can be protected in the same way.

The residual air-gap 88 between the two ferromagnetic elements or magnets is arranged so that  
25 the distances between the two are smaller than the width of the magnet divided by 6.



Figure 3f is a schematic representation of a fastening between a magnet and ferromagnetic element for a multipolar bar magnet 90 when this magnet is magnetised alternately north-south as shown in figure 3f, between sections of magnets making up the same bar.

This thus ensures better efficiency of the system, particularly if a flux blocking fixed part 91 is added, for example a parallelepipedic strip in soft steel, on the rear side of the multipolar structure.

In this case, the binding power at the residual air-gap is the same as that of a fastening containing two identical multipolar structures.

However, it can be seen that in the presence of this residual air-gap, the reduction of the binding power is more marked when this type of structure contains an internal magnetic circuit.

In effect, everything is the same as in the fastening of the type described above in reference to figures 2o or 2p, but with an effective air-gap double that of the actual air-gap.

It can also be seen that the efficiency of the soft iron can be improved by varying its thickness, for example in the case of a magnet measuring 15x13x11x3 mm, the piece of soft iron will be at least 2.5 mm thick.



To sum up, the use of a simple magnet in fabric sheathes in particular, gives high binding powers but produces leakage fields.

The devices described in reference to figures 3a to 3f, which are also compatible with inclusion in fabric sheathes, can be used to limit, and even more or less eliminate this leakage.

In addition, the use of so-called periodic or multipolar structures, as described in reference to figures 2, will reduce the distant field while maintaining the binding powers identical to those of simple structures at an equal volume.

In addition, closed flux structures, of the type described in reference to figure 3f, particularly when the magnetic bar is sandwiched between two pieces of soft steel, will also minimise magnetic leakage.

In all cases, the width  $b$  of a magnet should be selected to be greater than the thickness  $e$  of the residual air-gap which is created by the fabric of the sleeve or sheath.

It is preferable to use a magnet width  $d$  six times greater than the air-gap and preferably twelve times greater than the air-gap in structures of the type described in reference to figure 3f.

2001/210

7

Figures 3g and 3h show a simple representation of an embodiment of a magnet or ferromagnetic element 92 according to the invention which is welded or glued to a plate 93 in plastic material or any other material, allowing it in particular to be sewn (stitching 94) on the device or in the garment used. This method is therefore particularly suitable for the fixed part contained in the second part of the device.

Figures 3j and 3k similarly show a ferromagnetic element or magnet 95 which also has an insulating protective plate 97 between it and the plastic support wall 96, this plate for example being of the stainless steel type AISI304 as described above.

Figures 3m and 3n show the components of a device 100 according to the previous figures, in which the magnet 101 is embedded.

More specifically, figures 3m and 3n show two embodiments of a magnet or ferromagnetic element which may be used according to the invention on a support 104, for example in plastic material, one being rectangular and parallelepipedic 102, the other being in the form of a cylindrical or oval block 103.

In this example, the plastic supports are constituted more specifically of elements in the form of a plastic insulating ring, into which the magnetic elements are embedded, anti-magnetic protection 105

2007/210



being placed on one side of the magnet in order to protect the adjacent environment 106.

Figures 3o and 3p are a schematic representation of a device according to the invention, comprising a sheath  
5 of known fabric 107 with standard stitching 107' to which a ferromagnetic cloth 108 is added along all or part of its length.

The angle formed between the warp and weft of the ferromagnetic cloth and the sheath can for example be  
10 120° (vertical, diagonal or horizontal weft of threads) as shown in figure 3p.

This device allows optimum contact because it means the air-gap otherwise created by a cloth placed between the magnets 109, can be replaced by a ferromagnetic type  
15 air-gap.

The aim here is to obtain a level of transmission almost identical to that produced by placing two magnets against each other.

Figures 3q, 3r and 3s are schematic front and top  
20 views of a variant of the previous device, differing in that the sheath for the magnets 110 is of standard fabric 111 to which ferroconducting wire 112 is stitched.

It should be noted that the more stitches there are,  
25 the more effective magnetic transmission between the magnets will be (arrows or lines 113).



It is therefore possible to increase the efficiency of the basic systems by improving conductivity on magnetic contact, and therefore ensuring a more secure fastening.

5 Similarly, it will also be possible to improve miniaturisation of the magnets since large magnets are no longer necessary to perform an identical task, the size and dimensions of the magnets being inversely proportional to the air-gap.

10 Finally, the wire may also be an electric conductor wire allowing the transmission of electric signals, for example a signal being used to alert the user to check whether the garment is damaged.

15 In addition, the wire is designed to withstand the chemicals used during washing and to resist wear caused by friction or intensive use. It is also non-polluting and does not cause skin allergies.

20 To achieve this, galvanised stainless steel wire for example can be used which is very flexible and very fine and can be sewn using standard industrial sewing machines existing on the market or which already exist in factories.

Figure 4a shows a cross-section of an embodiment of a block 113 according to an embodiment of the invention,  
25 for a ferromagnetic element or magnet.

2001/210



This block comprises a central cylindrical part 114 and a rounded part at either end of the central cylindrical part in the form of a ring which therefore allows rounding of the corners.

5 This thus prevents marks appearing on the fabric 118 when ironing (iron 115) as shown in figure 4b, as opposed to what happens when a magnet 116 with square corners 117 is used as shown in figure 4d.

10 Figures 5a, 5b, 5c and 5d represent a motorised embodiment of at least one of the magnets or ferromagnetic elements according to the invention.

Figures 5a to 5d schematically represent a motor device 120, connected by a cable 121 to the magnet which is to be moved automatically using the motor.

15 Figure 5a shows a ring-shaped magnet 122.

Figure 5b shows a cylindrical magnet 123 containing a part capable of working in conjunction with a ferromagnetic element 124 of a complementary shape.

20 Figures 5c and 5d show the operation of a traction device which contains motorisation systems 120 or a spring pulled by a thread made out of flexible material such as that known under the trademark "Nylon", or by a reasonably flexible cable 121 welded onto the flat surface of a magnet 125 or the cylindrical part of the

2001/210  
f



ferromagnetic element, this cable connecting the magnet and the traction system as shown.

The surface and edges of the magnets may be smooth, ribbed, granulated, or coated in order to further  
5 improve the efficiency of the system of manual or motorised adjustment obtained via a traction motor.

In the case of a garment or device which may be subject to humidity, the motorisation system must be sealed to avoid problems when washing, and for example  
10 when used in underwater environments.

Figures 5e and 5f show two schematic half-section views of a shoe 130, 131 with two embodiments 132, 133 of traction devices.

These devices are used to pull in the internal wall  
15 134 using magnet 134', which results in the fastening and adjustment of the shoe.

Figure 5e shows more specifically how the internal wall of the shoe is pulled in and fastened through rotation of the axis 135 via a cable 136, driven by the  
20 motor 137.

The top of the shoe's sole is represented in 138, the foot being schematised in 139, and a switch 140 for starting the motor being located on the sole of the feet.



Figure 5f shows another embodiment directly controlling the rotation of the cylindrical magnet 134'' which then pulls in the internal wall.

These two procedures can be used together to obtain  
5 more effective fastening of the shoe.


Figures 6a and 6b represent front and cross-sectional views of another principle of adjustment, this time applied to the hem 140 of trousers, jackets, skirts or any other garment.

Two embodiments are possible with reference to  
10 figures 6a and 6b, in a first case one of the ferromagnetic elements or magnets 141 is cylindrical and the other 142 parallelepipedic; in the other case both 141 are cylindrical.

This device uses the basic principles of the  
15 invention and makes reference to figures 2, 5c and 5d.

The user can adjust the hem and lining d of the garment to the required size by activating a system similar to the principle of adjustment for shoes  
20 described above, and this may include different variants applied to a hem or part of a garment such as those with detachable or retractable hoods.

In the case of figure 6c, dimensions can be automatically adjusted (motor 143 and cables 143') by



storing the measurements of one or more users, or via a photoelectric cell 144 inserted in the garment.

Adjustment using a photoelectric cell makes it possible to locate the wrist or part of the body on which the garment will be adjusted.

A remote control device or a system 145 for automatic detection of external parameters such as cold, humidity and heat, can be also used to activate the cylindrical magnets 141 around axis 146, containing also and for example an adjustment microprocessor.

The second magnetised part may be replaced by a steel mesh type ferromagnetic cloth in order to improve its ability to adapt to the functions required.

Figures 6d, 6e, 6f and 6g show other principles of hem adjustment.

The device uses the basic principle, namely the sliding of a movable magnet 4 in a sheath 2, placing a fixed magnet 6 on one part 150 of the garment and bringing them together through magnetic contact 151.

The garment is adjusted by moving the movable magnet in the sheath.

This principle of adjustment can be adapted to all changes in relation to volume, size or height, and length or width of a garment.

2001/210



It may be used for the hem of trousers, skirts, jackets or any other garment and may be used either horizontally or vertically.

The sides of a garment can be horizontally adjusted, making it easily possible to change the width of a garment from size 38 to size 42 without having to unstitch and then re sew the garment.

Vertical adjustments can also be made to alter the length of a hem.

In this case, clothing may be weighted 151 in order to improve the hang of certain garments.

Figures 7a, 7b and 7c show cross-sectional views of three examples of devices using elastic to horizontally and/or vertically fasten and tighten items according to an embodiment of the invention.

The fixed support 160 or elastic 161 or spring 162 moves in a sheath 163 to allow sliding adjustment.

In these three cases, traction is used to adjust the items as described in the following embodiments.

In figure 7a, the elastic is twisted horizontally 164 which pulls the tab 165 with the magnet 166 at its end.

In figure 7b, twisting is obtained by vertically pulling the elastic.

Figure 7c operates through circular traction of a spring wound around an axis.



The three modes of traction can be adjusted or locked using an adjustment knurl (not shown).

The principle of adjustment includes a variant of the manual and/or automatic adjustment which is  
5 illustrated in figures 7a and 7b.

Its principle is based on the use of the tab located in the sheath 163.

This tab has the magnet 166' at its outer end, which terminates on one side of the upper, and which will be  
10 held in place on the other side of the upper by another partially magnetised magnet which can be hidden in the lining on the top of the upper.

Adjustment can then be carried out in two ways, by pulling the elastic vertically (figure 7a) or by pulling  
15 the elastic horizontally (figure 7b), which comprises a cable wound around an elastic and/or a flexible coiled material or another type of spring-operated system.

In reference to the different figures 7a, 7b and 7c, the device may comprise a sufficiently large sheath 163  
20 to house the fixed magnet or the metallic part and a second sheath designed to allow sliding of the movable magnet.

The system will therefore operate according to the following fundamental rules:

- 25 1. The pull between the two magnets allows garments to be fastened and adjusted.



2. The mobility of the second magnet allows the adjustment of the system by pulling the sheath that it contains.

Figures 7d, 7e, 7f and 7g show schematically the 5 different principles of traction of a magnet in a sheath.

Figure 7d shows the possibility of pulling on two magnets 180 and 181 and/or ferromagnetic elements, the first part and second part being opposite each other and 10 each one having a sheath 182.

Figure 7e represents the principle of pulling a parallelepipedic magnet 183 via an axis 184, activated by a cable 185.

Figure 7f represents a similar principle of traction 15 of a cylindrical element 186.

Figures 7g and 7h show traction via a cable 187 of an insulating cap 188, attached to the magnet 189 for example via an anti-magnetic protective device in the sheath 191, the active polarised face 190 being towards 20 the top in the figure.

Figures 7i, 7j, 7k, 7l and 7m show principles of motorisation identical to those described in reference to the figures 7d, 7e, 7f, 7g and 7h but in these examples traction of the elastic is provided by a tab 25 192 and a cable 193 that the user will pull to bring the magnet to the end of the sheath.

This sheath may have a hole in it so that the cable and tab protrude from it.



The cable is for example screwed, welded or glued to the magnet itself.

Figures 7n and 7o show a principle identical to that of the previous figures but in these examples the magnet  
5 194 is welded, screwed or glued to a base 195 made out of elastic or plastic material which supports the magnet and which is used to accompany the magnet in its sheath.

Variants of cables are shown in figures 7p, 7r and 7s.

10 Figure 7p shows a cable 196 for example made out of known material under the trademark "Nylon", fitted at its end with a device 197 allowing the user to activate it, for example a pull or a grip tab.

Figure 7q shows the use of an elastic 198, figure 7r  
15 the use of a thread 199 known under the trademark "Lycra" or similar, around an elastic thread 200, the aim being to allow the latter to retract without being pulled inside the sheath.

Figure 7s shows another embodiment, this example  
20 using a guide spring 201 possibly with an elastic thread 202 and/or a cable 203.

Figures 8a, 8b, 8c and 8d give embodiment examples of magnets which may be used in particular with the invention.



The aim here is to design magnets which can be attached for example by stitching on a garment and/or other device.

To do this, the magnet 210 or ferromagnetic element  
5 is formed from a cylindrical or parallelepipedic block containing a central cylindrical recess 211 and a transverse channel 212 perpendicular to the axial recess and parallel to the upper surface 213 of the magnet through which a sewing thread can be run entirely below  
10 the said surface.

The channel can be open or closed, it can be duplicated, even triplicated, as can the central cylindrical recess, and allows an electric conductor wire 214 to run along it without any wire ever  
15 protruding in relation to this surface, this allowing effective fastening, the wire being for example a ferromagnetic or electric wire which can be also used for detection purposes.

Figures 8e, 8f and 8g show the magnets 220 of the  
20 type described above but containing this time at least two cylindrical holes 221 parallel to the axis of the block formed by this magnet and containing an upper cupel 222 through which the thread can run without there being any risk of protrusion in relation to the active  
25 surface 223 which will be in contact via the air-gap with the magnet or the ferromagnetic element opposite it and which it works in conjunction with.

2001/210

f



Such buttons can be easily added by a manufacturer using a button sewing machine and standard thread (such as cotton or cotton polyester) or even stainless steel wire, or copper or silver-copper electric wire, with or without sheathing.

Figures 8f and 8g show variants with magnetic insulation on one side 224 or on one side and the walls, the inner side, and the lateral walls 225 of the magnet or ferromagnetic element.

Figures 8h, 8i and 8j show several blocks 226, 227 of magnets according to the invention, containing one or two axial openings 221 through which the thread or wire runs, arranged along a vertical strip, for example a long and narrow strip, used to magnetise a corresponding area around these elements, the said elements being alternate and capable of connecting one to the other as shown in figure 8j.

Figures 8o and 8p show a device 230 using blocks 231, 232 with conductor wire 233 as described in reference to the figures 8h, 8i and 8j, which may be connected to a detection system 234 of a known type and containing in particular an alarm 235 and/or a voice transmitter 236.

The aim here is to allow the fastening of two parts of a garment and avoid fastening buttons which are not designed to fasten together.



An electric signal can be transmitted by means of the wires connected to the magnets.

Thus, if the buttons are not connected, an alarm message will indicate that the garment is not properly fastened and that there is a risk of contamination and/or irradiation, etc.

Figures 8q, 8r and 8s are of the type described in reference to figures 8o and 8p, the device 240 being in addition connected 240' by a remote control system 241, for example an infrared system, to a sensor 242 which will allow the opening of one part 243 and the wearer of the garment to move from one room to another.

Thus, if the garment is incorrectly fastened, the user will not be allowed to go back into the room.

Figures 8t, 8u and 8v show an additional principle to the device 240 described above in reference to figures 8q, 8r and 8s, intended for safety clothing 243', in particular for laboratories, which must not under any circumstances have any holes or the user risks contamination.

This principle comprises a specially adapted cloth 250 in which fine conductor wire 251, either copper or copper-silver type, and sheathed or unsheathed, is screwed to the inner surface of the preferred type of fabric 252.

This wire transmits an electric current (battery 253) designed to confirm that the garment is neither damaged nor has holes in it.



If the garment is damaged, the thread will be cut and the current no longer passes through it.

A signal is then transmitted to warn of the danger.

It goes without saying that only low voltage current  
5 is used.

Figure 8t shows that the wire can be guided around an elastic thread, in order to increase the elasticity of the fabric and therefore the ease with which the garment is worn.

10 This newly constituted wire can itself be covered with an insulating sheath.

Figures 9a, 9b and 9c show embodiments of clothing according to the invention.

Figure 9a shows a pair of overalls 260 with braces  
15 261 containing a device according to the invention, as represented on figure 9b equivalent to figure 1a, this allowing adjustment of the length of the braces.

After putting on the overalls, the user must place the magnets in a position of attraction, the latter  
20 attracting and sticking to each other, which results in the two parts of the garment being held firmly together.

He then positions the fixed part in the body of the garment against the movable part(s) in the braces and then pulls on the braces(s) in order to adjust the  
25 overalls to the correct length.



This particularly innovative and recreational way of fastening and adjusting clothes allows children in particular to get dressed and undressed on their own.

It also allows immediate adjustment to the changing measurements of children and increases the lifetime of children's overalls, for example through easy alteration to reflect their growth.

In the case of overalls, the sliding of the magnet in the sheath of the braces allows this contact, adjustment and fitting to the measurements of the child.

The sides and crotch of the garment can also be fastened by joining the fixed parts as described above, these being comprised of magnets or metallic parts placed in one or more sheathes or using magnets or metallic parts drilled with holes and stitched in place on the parts of the garment as shown in figure 9c.

Figure 10 shows underwear 262, the size 263 of which can also be horizontally adjusted with a device according to the invention.

Figures 11a, 11b and 11c show a device for adjusting skirts 264, trousers 265 or belts 266 using the principle of the invention.

The device uses the principles outlined above and allows adjustment of a belt, for example with two sets of two magnets, each set comprising one fixed 270 and



another movable 271 magnet, in such a way as to provide effective contact over a sufficient length of the belt.

In the case of skirts or trousers, this system allows users to lose or put on weight as they please  
5 without having to change their wardrobe.

The principle of sliding between two sheathes placed opposite each other is the preferred arrangement for this device.

Figures 11d, 11e and 11f show another embodiment,  
10 this time applied to a jacket 273 and using the principle 274 described more specifically and particularly in reference to figure 11a.

Figures 11g, 11h, 11i, 11j and 11k give other variants of the device applied to a jacket, but this  
15 time the belt (buckle 276) is added to the jacket and adjustment can for example allow correct reinforced fastening, for example using a buckle 275, the action of which guarantees that the jacket is correctly done up.

Figures 11l, 11m and 11n show devices 280 which in  
20 these examples are on either side of the belt and no longer only at the front.

The devices described in reference to figures 12 use the basic principles of the previous devices, and will allow, for example, children to easily put on and/or  
25 take off their shoes.



The top view in figure 12a shows a shoe 300 containing two solid sections 301 and 302 and one open section 303 separating the solid sections.

The shoes have for example three straps 304 attached  
5 to the right or left section 301 or 302 and containing in the length of the strap a sheath with a movable magnet 305 used to fasten the left and right sections together.

The right section 302 contains a fixed magnet 306.

10 Figures 12b and 12c use cross-sectional views to show the operation of the system according to the invention.

The user, having put the pair of shoes on, activates the fixed part against the movable part(s), the action  
15 of the magnets and ferromagnetic elements allowing secure fastening between the sheath and the fixed part.

The user then pulls on the tab 307 located at the end of the sheathes towards the sides to bring them closer to the central part, thus adjusting the shoe to  
20 his foot.

If motorisation is used, as described in reference to the cross-section in figure 12c, a motor 308 or a spring-operated system, powered by a battery 309, with the option of control by a microprocessor 310, pulls a  
25 cable 310 attached to the magnet or ferromagnetic



element 311 and allows adjustment of the shoe, this adjustment, for example, being associated with an adjustment knurl with the option of locking (not shown).

A control device, which may for example and in addition be activated by the heel of the user will start motorisation via a battery, this pulling with a single or double cable, for example in material known under the trademark "Nylon", the magnet for example of cylindrical form, for example coated with a layer of latex. This pulls the sheath 312 until the shoe is tightened.

This system may be associated with a control system assisted by a brain type microprocessor the principal functions of which are to ensure that the shoe is not over-tightened and to store the different adjustments adapted to the different uses of the said pair of shoes.

The device comprises a system for switch-operated adjustment of the shoe which, once again, may be in the sole, this allowing remote automatic adjustment of the shoe by remote control when the user puts his foot in the said shoe.

A disabled person for example will be able to activate it when he puts his foot in the shoe, this allowing gradual and automatic adjustment of the shoe.




Figure 13a shows another embodiment of a shoe 320 according to the invention.

Two solid sections, on the right 321 and left, are separated by an open section 322.

5 Several straps 323, made up of adjustment sheathes 326, are used, the fixed magnets 324 being attached to the solid sections and the movable magnets 325 in their sheathes being integral to the straps.

By means of the end tabs 327, the user can therefore  
10 tighten the shoe to the required shape by simultaneously pulling on the two tabs.

A device, for example a cord type arrangement, should preferably be included so that the tab does not disappear inside the sheath.

15 Figure 13b shows another embodiment of a shoe 330 according to the invention containing this time three solid sections, namely a right section 331, a left section 332 and a central section 333, and two open sections, each one separating the two solid sections on  
20 either side of it.

The device here has for example three or four straps 334 attached in the middle to the central section with fixed magnets and with sheathes 326 on either side containing movable magnets 325 used to fasten the right





and left sections to the central section in order to adjust the tightening of the shoe.

In this example the straps or sheathes contain three magnets, namely two movable magnets 325 in the sheathes  
5 on the sides and one fixed magnet 324 in the centre.

These straps can also be fastened to the centre with the central magnet, the shoe being adjusted by simultaneously pulling the straps towards the right and left sides of the shoe.

10 Figures 14a, 14b, 14c and 14d show another embodiment of the invention of the type of shoe described in figures 13b and 13d.

In this example the straps 330 are attached at their ends by magnets which will be activated by internal  
15 motors 331, the said straps being inserted inside the shoe in a double wall 332 and connected to a motor system, for example a spring which will allow them to be retightened.

The ends of the straps 330 are held in place with a  
20 magnet 333, 334 by means of another magnet 335 attached to the central section.

Device 340 in figures 15a and 15b uses the basic principle of the previous device. In this example, it has a different and more discrete adjustment and fitting  
25 system, as it is internal and inserted inside 341 a double wall in the shoe.



There are therefore no straps 342 or adjustment sheathes hanging outside the shoe after tightening.

When adjusted, the adjustment sheathes are housed in the empty space between the inner wall and the right-hand side, the left-hand section being the point from which these straps start.

A fastening method in figures 15a and 15b also uses for example a cable 343 which is accessed by a spring or motor as described above.

The cable is attached to the end 344 of the tab.

Figures 16a, 16b, 16c and 16d show another embodiment of a device 350 which once again uses the basic principles of the previous device.

It has a different adjustment and fitting system. In this sense, it is also internal but in the opposite direction, allowing adjustment which is equally effective.

Figure 16b shows the system when it is open, that is, when the end magnets 351 of the straps 352 are separated from the fixed magnets 353 in the right-hand part of the device.

Figures 17a and 17b use the principles described in figures 6a and 6b, applied in this example to a shoe 360 which is fastened without using the hands, through contact of the foot on the floor 361 of the shoe which



contains a switch 362 to activate the device, bringing the magnets 362 together to adjust the fastening.

Figures 17c, 17d, 17e, 17f and 17g are operational variants of the corresponding device showing schematic cross-sectional and top views. In this example, the side sections 370 of the shoe can be fully separated from each other and when they are brought together, the magnets in the sheath 371 will connect to each other (figure 17f), and pulling on the ends 372 of the tabs allows effective tightening.

Figures 17i and 17j show a system for shoes in which the tab 380 crosses the end 381 of the left section of the shoe to then come back to the right section and two sliding magnets 382 are placed firstly at the end 383 of the tab pulled out from the right section, and secondly on a portion of the tab before it passes through the end of the left section.

The magnets will therefore work in conjunction with each other and allow a double tightening through the sliding of the tabs around the magnets.

Figures 18a, 18b and 18c show a garment 390 using the principles of tightening in a horizontal adjustment device, for example for a dress, a shirt, a pair of trousers or any other garment according to the invention.

2001/270



This system allows horizontal adjustment through two or more magnets 391 or ferromagnetic elements arranged in the belt 392 at the sides 393 of the garment, which means that when the magnets are connected to each other, it is then possible to pull via the end of the sheath (not shown) to tighten the waist on one or either side.

Figures 19a and 19b show a device 400 for adjusting a doctor's or dentist's coat 401 with a detachable bib that can be easily renewed for each patient.

This device still uses the principle of fastening clothing by sliding a magnet 402, 403 or ferromagnetic element in a sheath 404 level or approximately level with the top 405 of the coat.

The bib has two or more magnets or ferromagnetic elements so that it can be attached to the coat without the wearer having to have a cord around his neck.

For easy manufacture, the invention will require the use of specific sewing tools. The surface of the work area is thus adapted to facilitate the insertion of the magnets. It is made from material which insulates it from the magnetic fields, by creating a significant air-gap between the elements and the machine.

2001/240

f

Anti-magnetic protection on the table is preferable, as is an oval, square or any other shaped recess adapted to the function required, thus allowing the insertion of the magnet.

- 5        The use of tools such as presser feet and scissors made from non-ferromagnetic material in order to facilitate the insertion of the magnets is also necessary.

- 10       Given that it is self-evident and given what has been written above, this invention is not limited to the embodiments more specifically described, on the contrary it covers all variants, and particularly those in which the devices are applied to elements other than those specifically described in relation to clothing.

15

2001/210

8



CLAIMS

1. A device (1, 8, 13, 22) for holding together, adjusting, fitting or fastening parts of a garment, shoe, or any other accessory, wherein a first part (2) containing at least one first sheath (3, 9, 15, 16, 24) in which at least one first magnet or ferromagnetic element (4, 11, 17, 24) is inserted, these being movable inside the said first sheath, and a second part (5) containing at least one second magnet or ferromagnetic element (6, 12, 18, 30) subject or submitted to the magnetic attraction of the first magnet or ferromagnetic element of the first part, are used to hold together, adjust, fit or fasten the garment, shoe or accessory when one of the first and second parts (2, 5) is activated by a user to work in conjunction with the other part, a multitude of adjustments or alterations being possible through the sliding of the first magnet or ferromagnetic element in the said first sheath.

2. A device as claimed in claim 1, wherein the second magnet or ferromagnetic element (12) is itself included and movable in a second sheath belonging to the second part.

2004/210

J

3. A device as claimed in claim 1, wherein the second magnet or ferromagnetic element (6, 18, 30) is attached to the second part.

4. A device as claimed in any preceding claim,  
5 wherein the first part and/or second part (14, 22, 23) have two sheathes.

5. A device as claimed in any preceding claim, wherein one of the first and second parts is at least in part formed by a strap (333, 334, 330) or braces (261).

10 6. A device as claimed in claim 5, wherein at least one of the first and second magnets or ferromagnetic elements is formed by a magnetised or ferromagnetic area on the said braces or strap belonging to the first or second corresponding part.

15 7. A device as claimed in any preceding claim, wherein one or more magnets or ferromagnetic elements (34) of a part of the device, are concave in shape, and the magnet(s) or ferromagnetic element(s) (35) of the other part is(are) convex in shape and complementary to  
20 the said concave shape.

8. A device as claimed in any preceding claim, wherein one or more magnets or ferromagnetic elements

2001/120



(4, 6, 11, 12, 17, 18, 25, 30) are flat, trapezoid, rectangular, circular or triangular in shape.

9. A device as claimed in claim 8, wherein at least one magnet or ferromagnetic element (35, 41) of one part  
5 is cylindrical.

10. A device as claimed in claim 9, wherein the corresponding magnet or ferromagnetic element of the other part is flat.

11. A device as claimed in claim 9, wherein the  
10 corresponding magnet or ferromagnetic element (48, 52) of the other part is cylindrical.

12. A device as claimed in any preceding claim, wherein it contains the means (55) for mechanically moving the sheath(es).

15 13. A device as claimed in any preceding claim, wherein at least one of the first and second parts has a series (67) of at least two magnets or ferromagnetic elements (68, 69) hinged together.

14. A device as claimed in any preceding claim,  
20 wherein at least one of the magnets (70, 71) is surface-polarised.

03057347.010403

2001/210

R



15. A device as claimed in any preceding claim, wherein the polarisation of at least one of the magnets is axial (78), parallel to the sheath.

16. A device as claimed in any preceding claim,  
5 wherein at least one of the magnets (72, 73, 79, 80, 81, 82, 83) is multipolar.

17. A device as claimed in any preceding claim, wherein it contains at least two magnets (80, 81, 82, 83) in the same sheath, of opposite polarisation.

10 18. A device as claimed in any preceding claim, wherein each magnet (85) is associated with an anti-magnetic protection component (86, 77, 91, 105).

19. A device as claimed in any preceding claim, wherein at least one magnet being multipolar, it is  
15 sandwiched between two parts (91) used to block the magnetic flux.

20. A device as claimed in any preceding claim, wherein the magnet being of width  $d$ , the structural thickness of the device between the magnet and  
20 ferromagnetic element is less than  $d/12$ .

21. A device as claimed in any preceding claim, wherein at least one magnet or ferromagnetic element is glued, welded or embedded on a support plate (93, 96, 104).



22. A device as claimed in any preceding claim, wherein the sheath also has a strip of ferromagnetic cloth (108) along all or part of its length.

23. A device as claimed in any preceding claim,  
5 wherein the sheath also has stitches sewn with ferromagnetic conductor wire (112) along at least part of its length.

24. A device as claimed in any preceding claim, wherein the magnets or ferromagnetic elements (114) have  
10 rounded edges (115).

25. A device as claimed in any preceding claim, wherein the magnets are produced from the family of rare earths of the type Neodymium Iron Boron.

26. A device as claimed in any preceding claim,  
15 wherein it contains the means (120, 137, 308, 331, 362) to activate the movable magnet(s) or ferromagnetic element(s) remotely.

27. A device as claimed in claim 26, wherein the means for remote activation contain the means for  
20 motorisation of at least one of the movable magnets or ferromagnetic parts, allowing the mechanical movement of the corresponding sheath(es).



28. A device as claimed in claim 27, wherein it contains the means for motorisation of at least one first and at least one second magnet or ferromagnetic element, capable of working in conjunction with the  
5 first one.

29. A device as claimed in claim 28, wherein the means for remote activation include a microprocessor, used for automatic adjustment so that the item can be adapted during use, by limiting tightening, and thus  
10 ensuring optimum adjustment.

30. A device as claimed in claim 29, wherein the means for remote activation also include the means for storing different adjustments, corresponding to different users or situations.

31. A device as claimed in any of the preceding claims 26 to 30, wherein the means for remote activation include a photoelectric sensor (144), and/or a  
15 temperature sensor, and/or a humidity sensor.

32. A device as claimed in any of the preceding  
20 claims 26 to 31, wherein the means for remote activation include an elastic or spring-operated traction system (161, 164; 160, 162) using attached or connected to the movable magnet or ferromagnetic element, and capable of acting through the corresponding sheath, and a system

2001/210



for locking the said traction system in one or more preset positions.

33. A device as claimed in claim 32, wherein the traction system is attached to the sheath, or passes  
5 through the said sheath.

34. A device as claimed in any preceding claim, wherein at least one magnet (210) is formed from a block drilled along its axis with at least one cylindrical hole (211) and containing, on the side of one of its  
10 surfaces, a transverse channel (212) parallel to the said surface and through which sewing thread can be run entirely below the said surface.

35. A device as claimed in any preceding claim, wherein at least one magnet is formed from a block  
15 drilled along its axis with at least one cylindrical hole and containing, on the side of one of its surfaces, a cupel (222) through which sewing thread can be run entirely below the said surface.

36. A device as claimed in any of the claims 34 to  
20 35, wherein the magnet has two cylindrical holes (212, 212').

37. A device as claimed in any of the claims 34 to 36, wherein the magnet(s) are covered with an anti-magnetic sheath on at least one surface.

2001/210




38. A device as claimed in any preceding claim,  
wherein it also contains the means (234, 235, 236) for  
detecting and signalling that the parts of the garment,  
shoe or any other accessory are correctly fastened or  
5 fitted.

39. A device as claimed in claim 38, wherein the  
detection and signalling system contains a circuit of  
conductor wires connected to the magnets or  
ferromagnetic elements, the said magnets or  
10 ferromagnetic elements acting as contactors to close the  
circuit.

40. A device as claimed in any of the claims 38 and  
39, wherein it also contains the means for triggering an  
alarm or sending a command if specific preset conditions  
15 are complied or not complied with.

41. A device for a shoe as claimed in any of the  
preceding claims dependent on claim 27, wherein the  
means for remote activation include a switch located in  
the sole of the shoe, which can be activated by the user  
20 when he puts his foot in the shoe, this allowing  
automatic adjustment of the shoe.

42. A device for adjusting the hem of a garment, as  
claimed in any of the claims 1 to 40, wherein the sheath  
is extended by a piece of fabric to which the second  
25 magnet or ferromagnetic element is attached.



43. A device as claimed in claim 42, wherein it is weighted inside the hem.

44. A shoe, containing a device as claimed in any of the claims 1 to 41.

5 45. A shoe as claimed in claim 44, wherein it is comprised of three solid sections, namely a right section (332), a left section (331) and a central section (333), and two open sections, each one separating the two solid sections on either side of it,  
10 the device containing at least one strap (334) fixed to the middle on the central section and fitted on both sides with sheathes (326) containing movable magnets (325), used to bring the right and left sections towards the central section, in order to adjust tightening of  
15 the shoe.

46. A shoe as claimed in claim 45, dependent on claim 27, wherein the device has at least one adjustment strap (330) containing a magnet or ferromagnetic part which disappears into the wall of the shoe, the motorisation  
20 system being capable of pulling or releasing the said strap automatically.

2001/210

f

47. A garment, containing a device as claimed in any of the claims 1 to 40, 42 and 43.

48. A garment as claimed in claim 47, dependent on claims 38 to 40, wherein it contains a cloth, the weft  
5 (401) of which is threaded with conductor wire connected to an alarm used to signal if the wire is cut and therefore that the garment is damaged.

49. An accessory such as braces or belts, bags, organisers and other types of leather goods, wherein it  
10 contains a device as claimed in any of the claims 1 to 48.

03837347 244000



1/41

Figure 1a




Figure 1b




Figure 1c


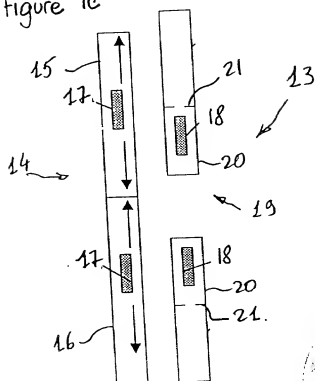


Figure 1d



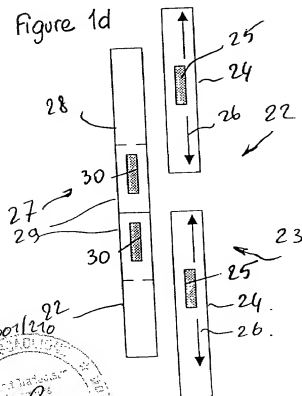

2/41

Figure 2 a




Figure 2 b




Figure 2 c




Figure 2 d




Figure 2 e







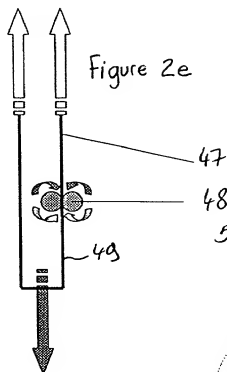


Figure 2 f

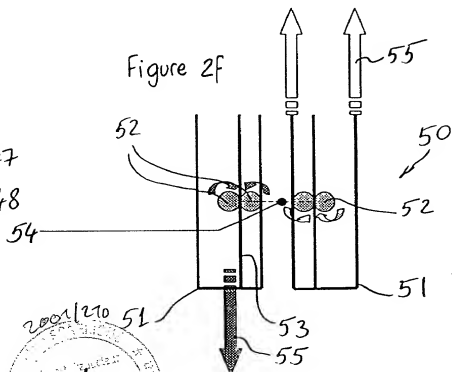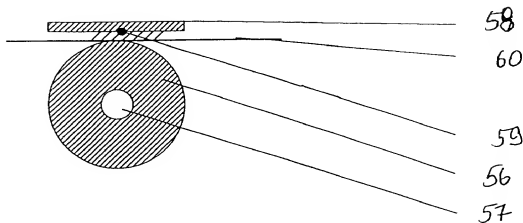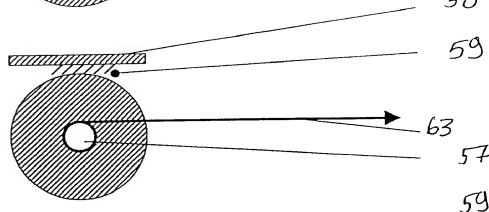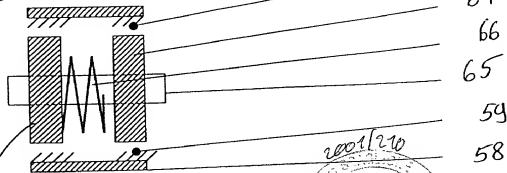

3/41

Figure 2g  
ProfilFigure 2h  
Coupe ouvertFigure 2i  
Coupe ferméFigure 2j  
FaceFigure 2k  
Face

4/41

Figure 2 l




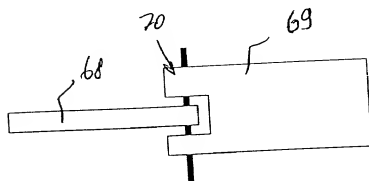


Figure 2 m

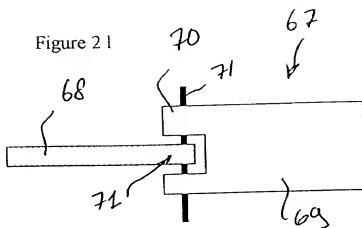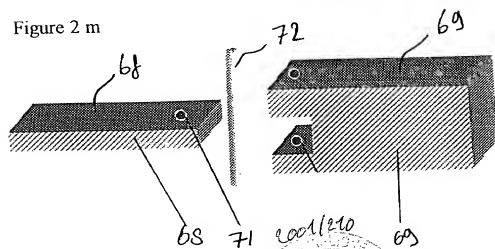

5/41

Figure 2o




Figure 2p




Figure 2q




Figure 2r




Figure 2s





Figure 2t



2001/210



09/857347-010402

6/41

Figure 2u




Figure 2v




Figure 2w




Figure 2x





Figure 2y



7/41




Figure 3a

Figure 3b




Figure 3c




Figure 3d




Figure 3e






Figure 3f



Fermé



8/41




Figure 3g




Figure 3h




Figure 3j




Figure 3k



9/41

Figure 3m


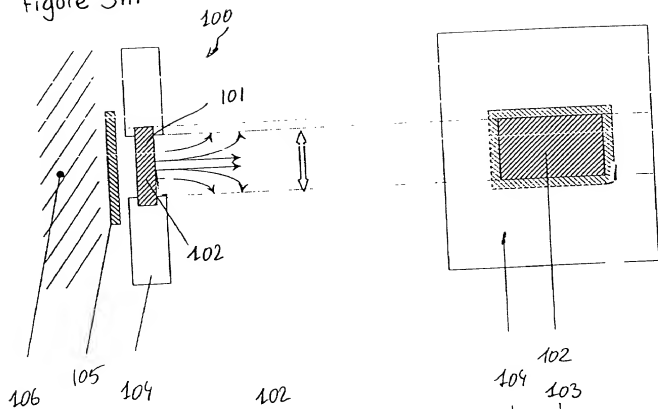


Figure 3n



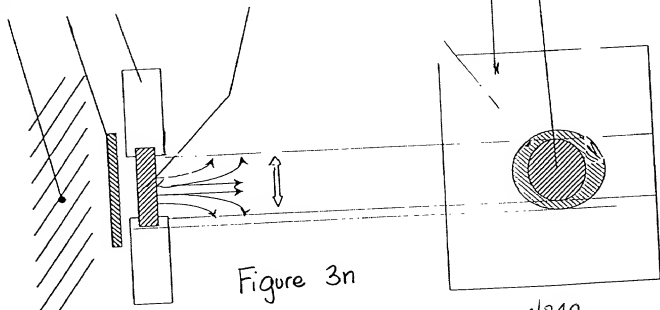

10/41

Figure 3a


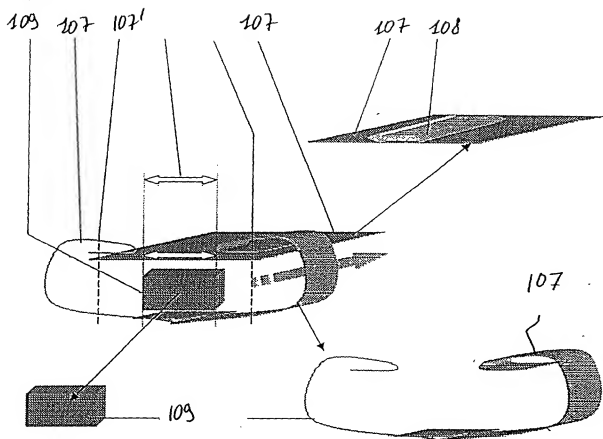


Figure 3p

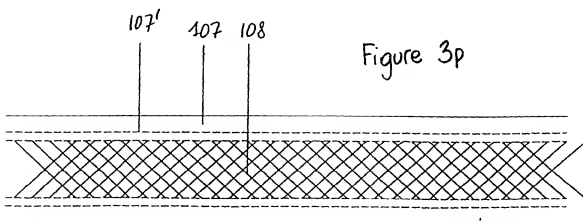

11/41

Figure 3q




Figure 3r



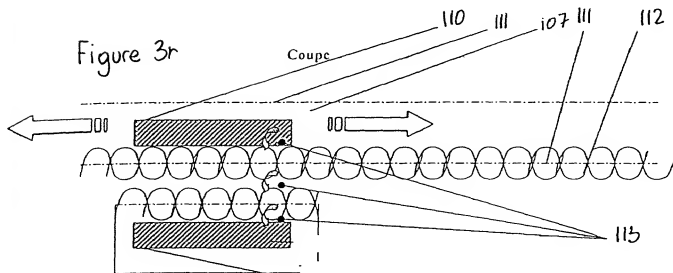


Figure 3s

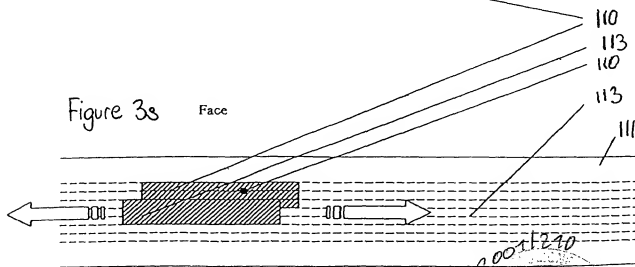

12/41

Figure 4a




116

Figure 4c




Figure 4b

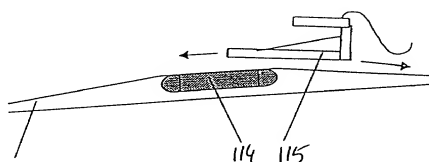


118 117 116

Figure 4d



13/41

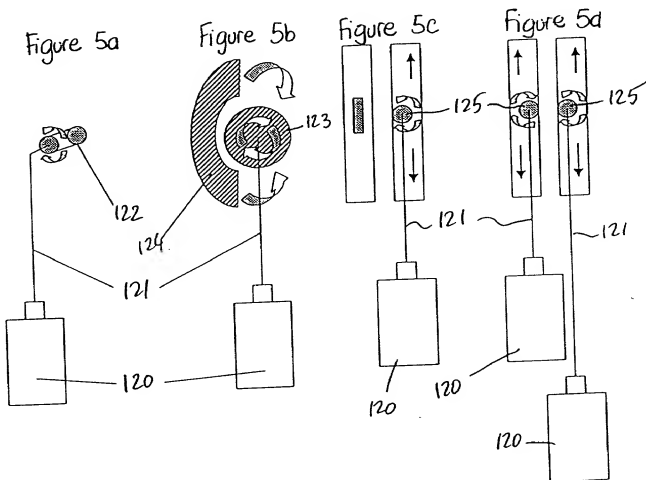

14/41

Figure 5e


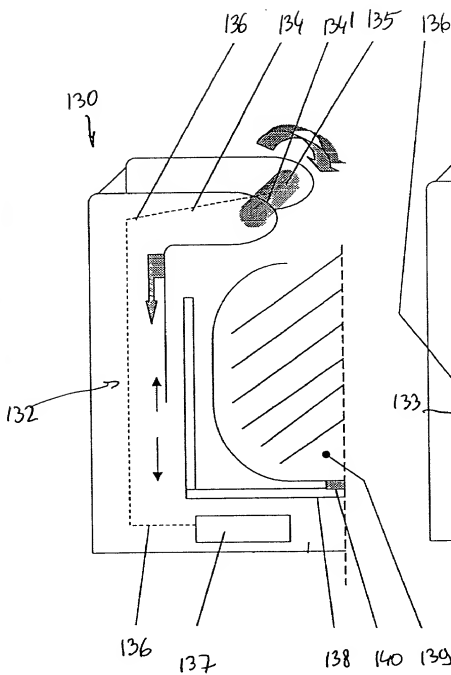


Figure 5f

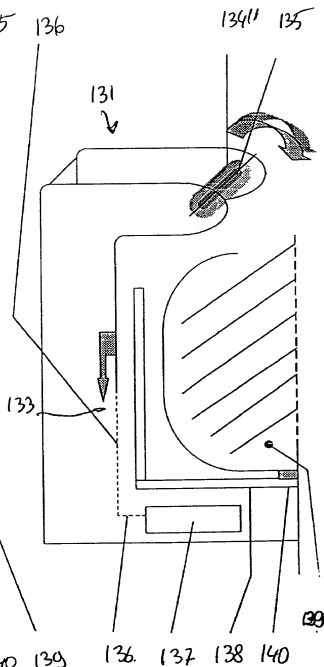

2001/210

15/41

Figure 6a

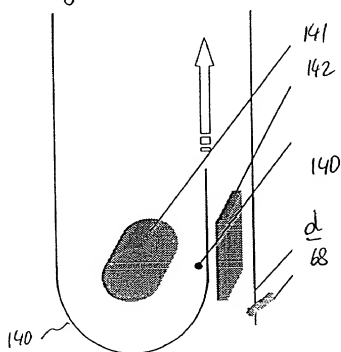


Figure 6b


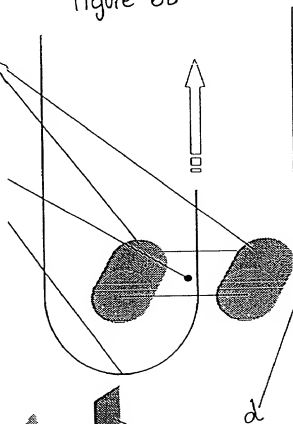


Figure 6c

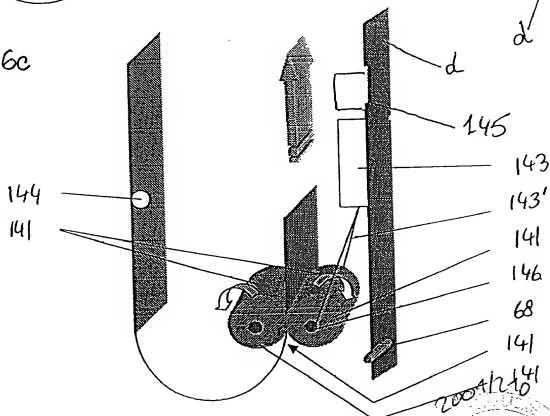

16/41

Figure 6d: Coupe







Figure 6e: Face

Figure 6 f: Coupe  
Ouvert FerméFigure 6 g: Coupe  
Ouvert Fermé

2001/210

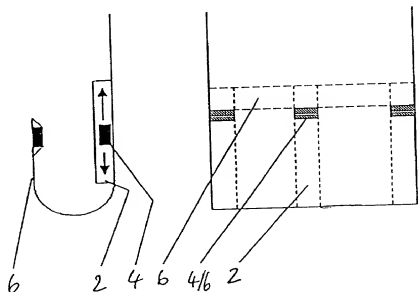

17/41

Figure 7a

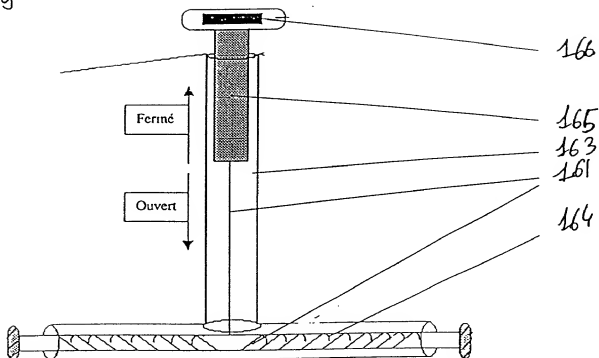


Figure 7b

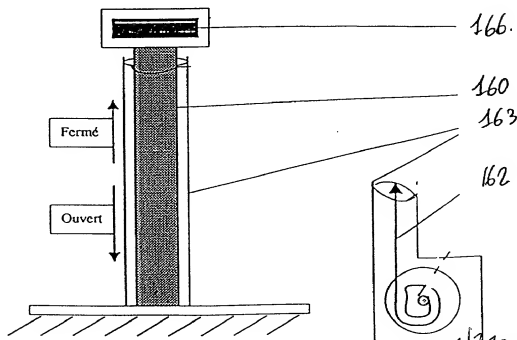


Figure 7c








2001/1210





18/41

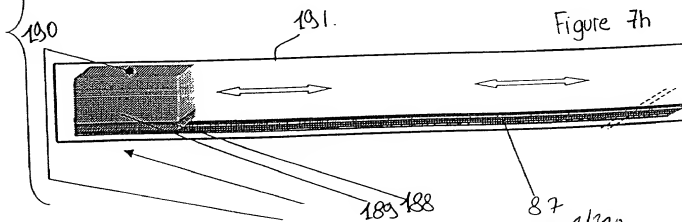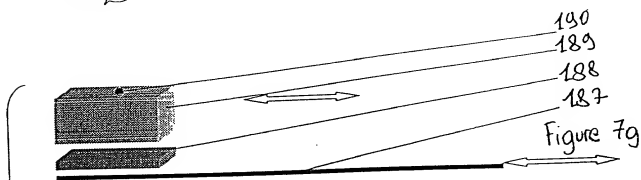87  
2007/210

19/41

Figure 7i




Figure 7j




Figure 7k




Figure 7l


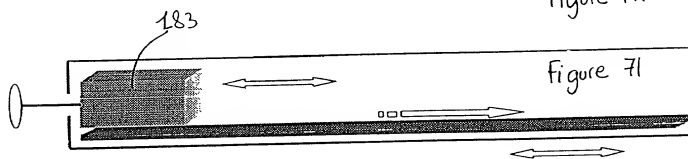


Figure 7m

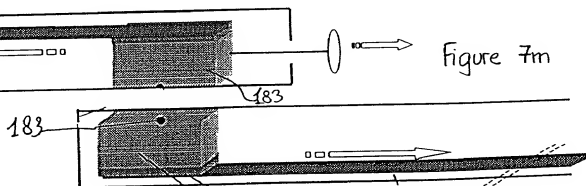

2001/210

f

20/41

Figure 7n

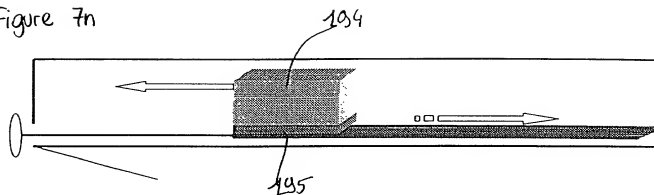


Figure 7o




Figure 7p




Figure 7q




Figure 7r





Figure 7s



21/41

Figure 8a




Figure 8b




Figure 8c





Figure 8d

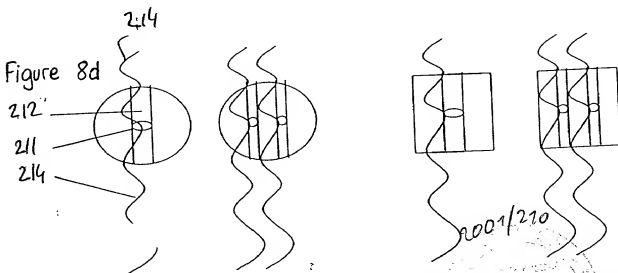

22/41

Figure 8e







Figure 8f



Figure 8g

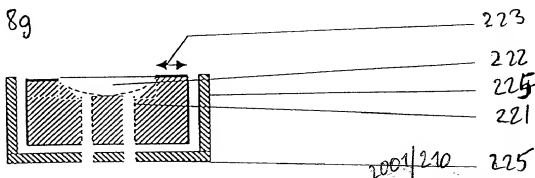

23/41

Figure 8h face

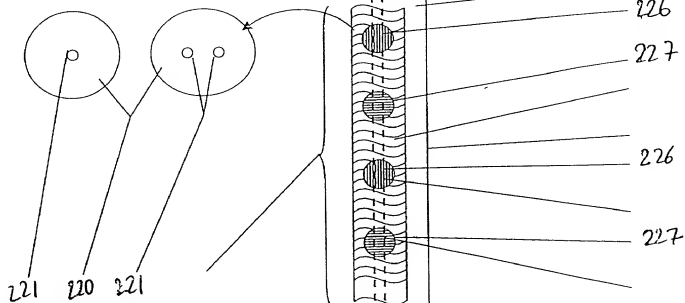


Figure 8i


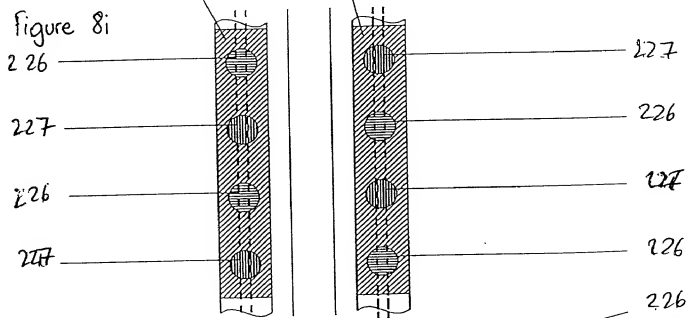


Figure 8j

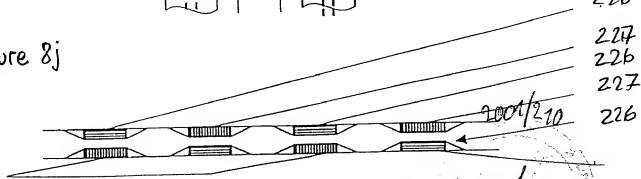

24/41

Figure 80 Face


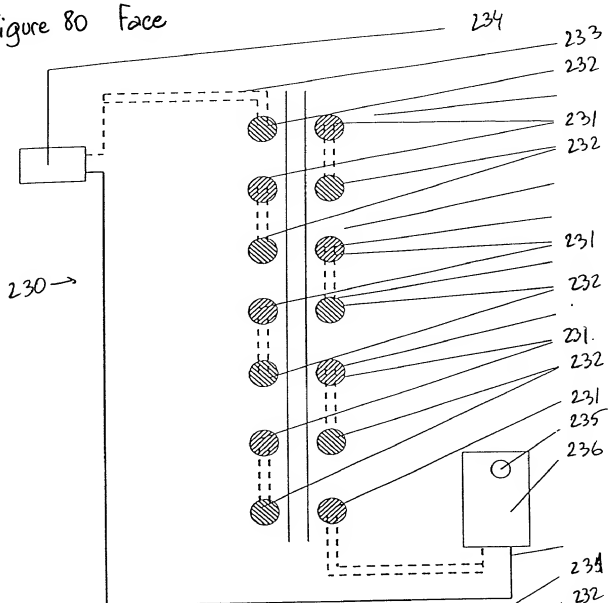


Figure 8p: coupe

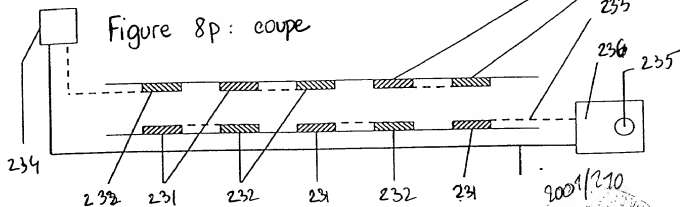

2001/210

f

25/41

Figure 8q : face

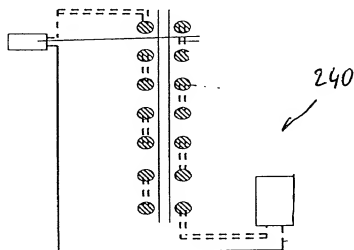


Figure 8r : face


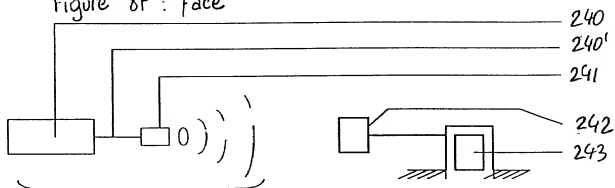


Figure 8s : face



2001/210



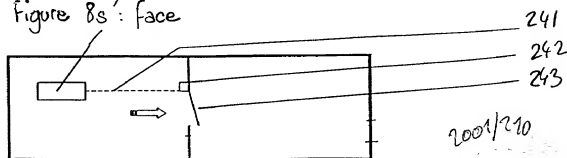

26/41

Figure 8t : face




Figure 8u : face


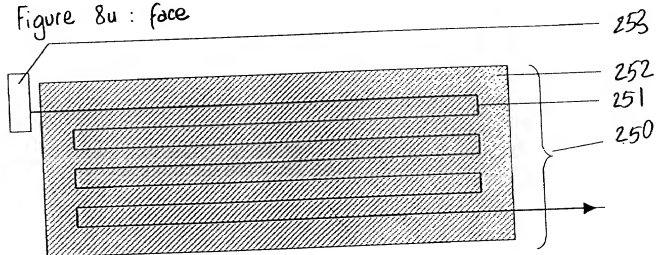


Figure 8v : face



2001/210

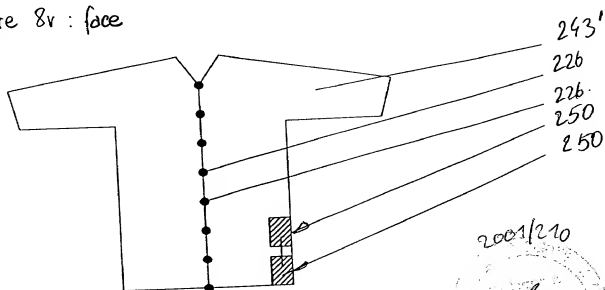

27/41

Figure 9a

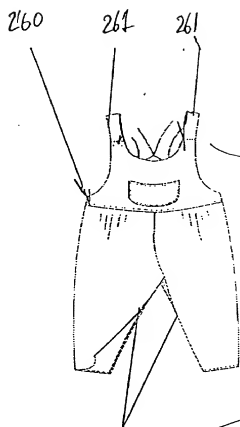


Figure 9b




Figure 9c





Figure 10



2001/210

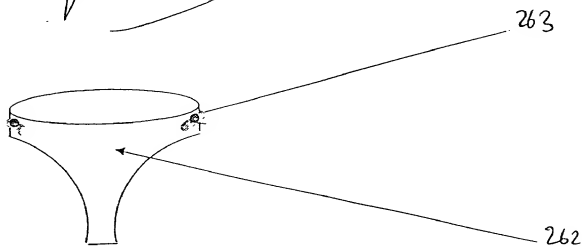

28/41

Figure 11a  
Coupe




Figure 11b  
face

270 271 266 270 271





Figure 11c  
face






2001/210



29141

Figure 11 d : face

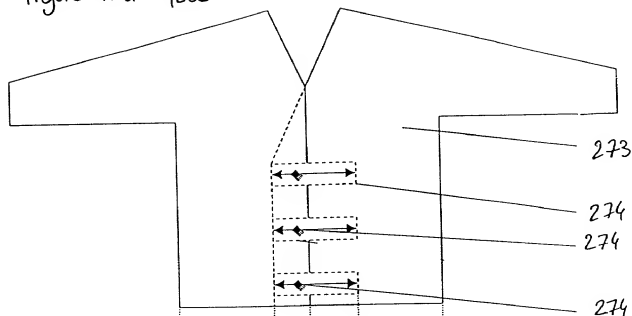Figure 11 e:  
Coupe: OuvertFigure 11 f  
Coupe: Fermé

2001/210



30/41

Figure 11g : face

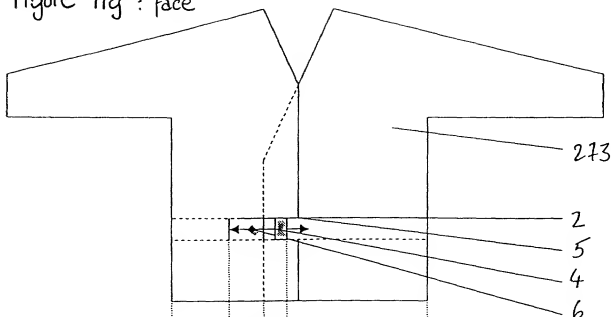


Figure 11 h  
Coupe: Ouvert



Figure 11 i  
Coupe: Fermé



Figure 11 j:  
Coupe: Ouvert





Figure 11k  
Coupe: Fermé



31/41

Figure 11L  
Face

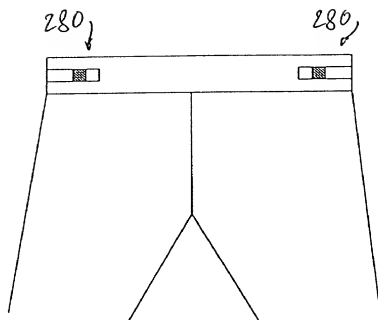


Figure 11m  
Profil





Figure 11n  
Coupe

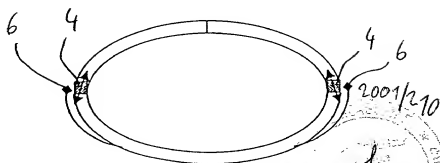

32 / 41


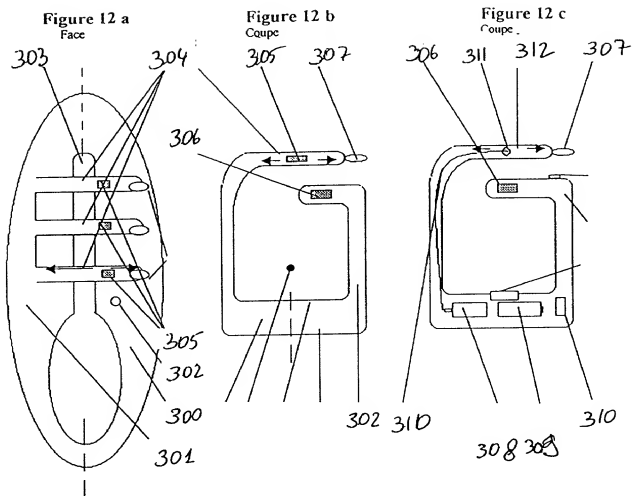


Figure 12 d : Profil

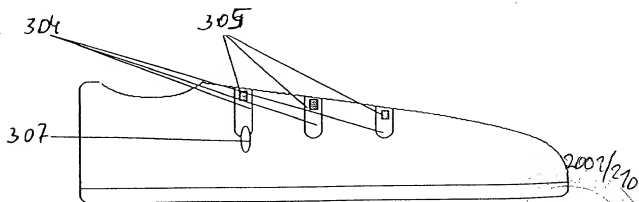

33/41

Figure 13 a

Face 320

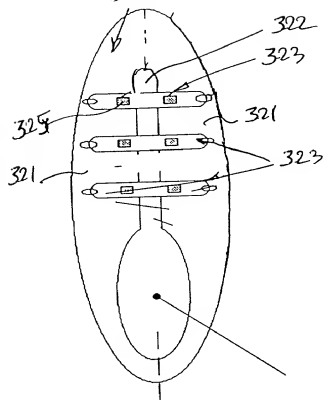


Figure 13 b

Face

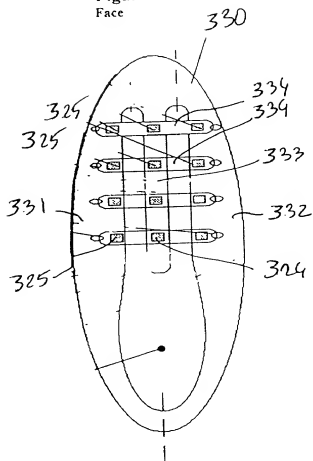


Figure 13 c

Coupe





Figure 13 d

Coupe



2001/20

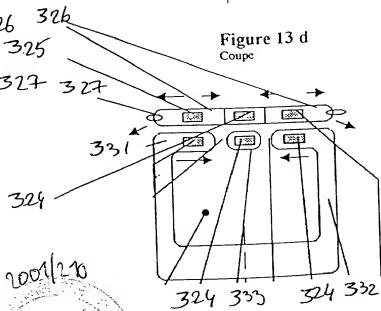



34/41

Figure 14a




Figure 14b




Figure 14c


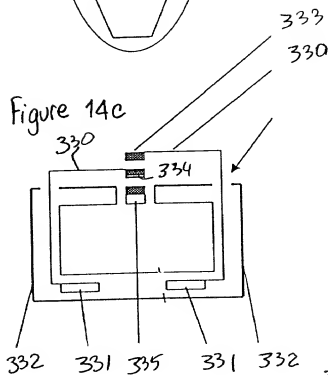


Figure 14d



2001/210



35/41

Figure 15a  
Face


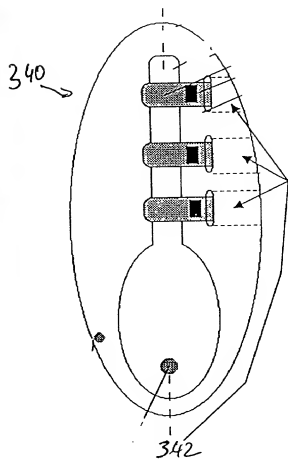


Figure 14b  
Coupe



2001/210

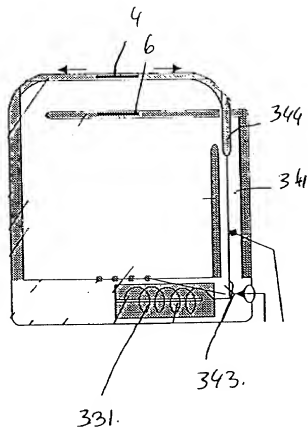

36/41

Figure 16 a

Face

Fermé

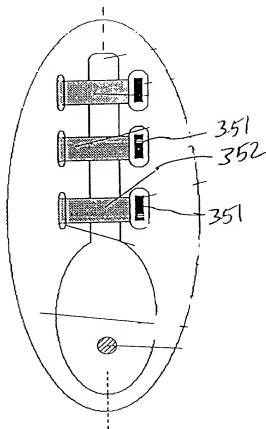


Figure 16 b

Face

Ouvert

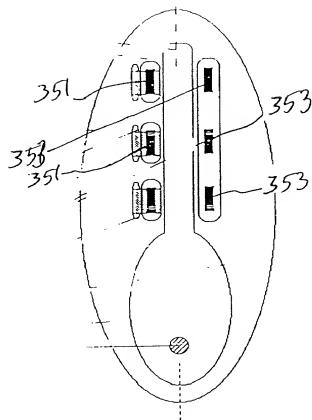


Figure 16 c

Coupe

Fermé







Figure 16 d

Coupe

Ouvert



37/41

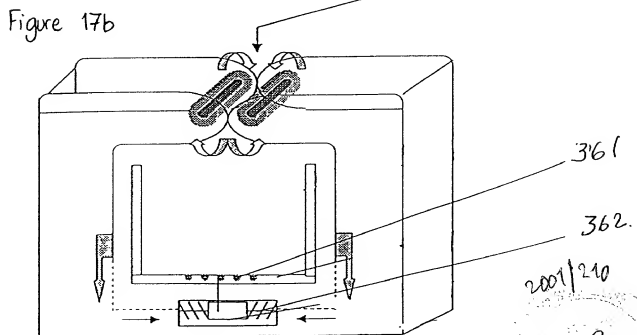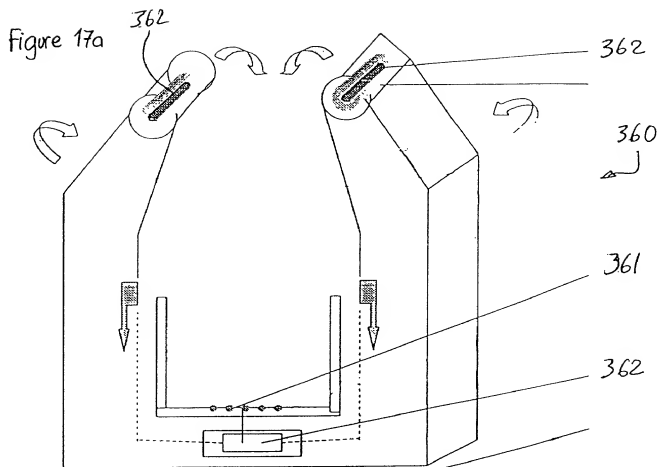

2001/240



38/41

Figure 17c

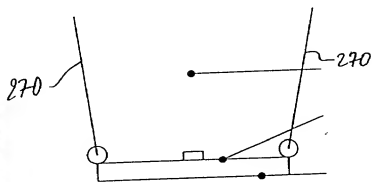


Figure 17d




Figure 17e





Figure 17f



2001/210



39/41

Figure 17h





Figure 17i



2001/210



40/41

Figure 18a


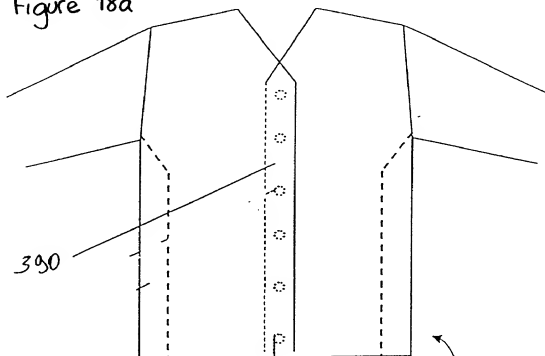


Figure 18b



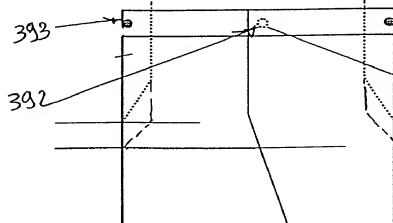


Figure 18c

2001/210

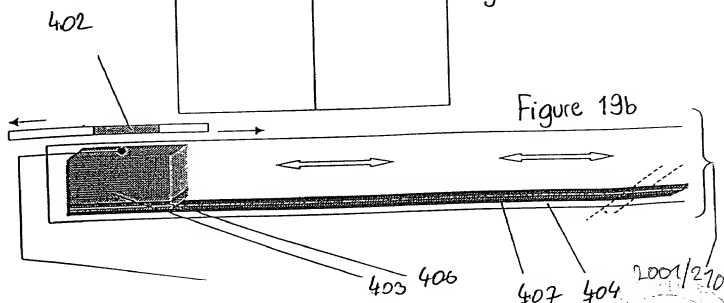

41/41

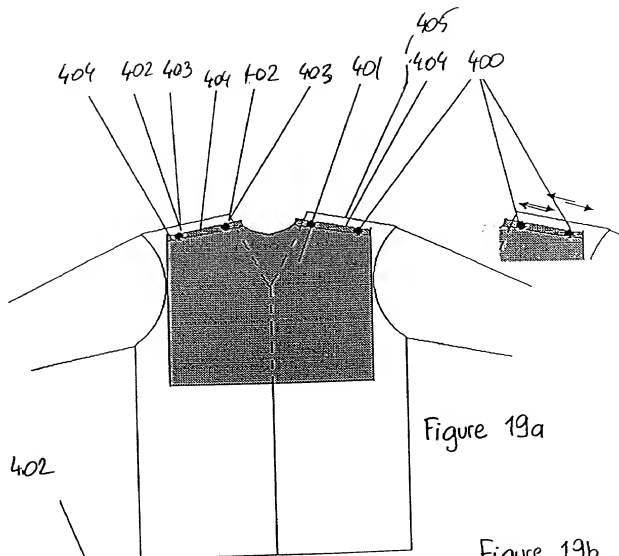



# DECLARATION FOR USA PATENT APPLICATION

(including Design and National Stage PCT)

Attorney's Docket ID: \_\_\_\_\_

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below adjacent to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled DEVICE FOR FASTENING OR ADJUSTING PARTS OF A GARMENT,

SHOE OR OTHER ACCESSORY

(check ☐ is attached hereto. \_\_\_\_\_, the specification of which  
one) \_\_\_\_\_

\_\_\_\_\_ is U.S. Application Serial No. \_\_\_\_\_ which was filed on \_\_\_\_\_

and (if applicable) amended on \_\_\_\_\_

☒ is International Application No. PCT/FR99/03017 which was filed on 03/12/1999

and (if applicable) amended on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) (\_\_\_\_\_) ADDITIONAL APPLICATIONS IDENTIFIED ON ATTACHED SHEET:

Number	Country	Day/Month/Year Filed	Priority Claimed
			Yes No
98 15307	FRANCE	03/12/1998	X

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below; and insofar as the subject matter of each claim of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application in accordance with 37 C.F.R. 1.63(d).

(\_\_\_\_\_) ADDITIONAL APPLICATIONS IDENTIFIED ON ATTACHED SHEET:

Application Serial No.	Day/Month/Year Filed	Status -- patented, pending, abandoned
_____	_____	_____

I hereby appoint the following to prosecute and transact all business in the Patent and Trademark Office connected therewith:

Andrew E. Taylor-12000	Thomas P. Sarro-19396	Douglas E. Jackson-28518	Harold L. Novick-26011
Walter C. Gilles-22086	Ross F. Hunt, Jr.-24082	B. Aaron Schulman-31827	Kevin J. Dunleavy-32024
Marvin Petry-22752	William E. Jackson-24016	Linda R. Poteat-36955	Paul A. Roberts-40289

Direct all telephone calls to \_\_\_\_\_ TEL (703) 920-7200.  
Address all correspondence to LARSON & TAYLOR, 727 23rd Street South, Arlington, VA 22202; Facsimile Tel: (703) 892-8428.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor	Citizenship
<u>SITRON Eric</u>	<u>FRANCE</u>
Full Post Office Address	
<u>14, cité Moynet - 75012 PARIS (France)</u>	<u>FR</u>

Residence - City, State/Country (if different from P.O. address)	
<u>SIGN AND DATE HERE: Inventor's Signature:</u>	<u>Date: 01-06-2001</u>

Full Name of Second Joint Inventor, if any	Citizenship
Full Post Office Address	

Residence - City, State/Country (if different from P.O. address)	
<u>SIGN AND DATE HERE: Inventor's Signature:</u>	<u>Date:</u>

Full Name of Third Joint Inventor, if any	Citizenship
Full Post Office Address	

Residence - City, State/Country (if different from P.O. address)	
<u>SIGN AND DATE HERE: Inventor's Signature:</u>	<u>Date:</u>

Full Name of Fourth Joint Inventor, if any	Citizenship
Full Post Office Address	

Residence - City, State/Country (if different from P.O. address)	
<u>SIGN AND DATE HERE: Inventor's Signature:</u>	<u>Date:</u>

SEE ATTACHED SHEET FOR SIMILAR INFORMATION AND SIGNATURE FOR ADDITIONAL JOINT INVENTORS.  
Law Offices of LARSON & TAYLOR, 727 23rd Street South, Arlington, Virginia 22202